Series 84

Attractive. Versatile and functional.

TECNEL SYSTEM S.p.A. - Via Brunico 15 - 20126 Milano - Tel. 02 2578803 (r.a.) Fax 02 27001038 -
Cert.CSQ-IQNet ISO9001:2015 N. 9101TNLS www.tecnelsystem.it e-mail: tecnel@tecnelsystem.it

84 Information about the Series

Key advantages

- Attractive design and reliable operation
- IP67 front protection
- Powerful, consistent illumination with innovative technologies
- Animated illumination options for a wide variety of potential applications
- Available with soldered, plug, PCB and flat ribbon cable terminals

Typical application areas

- Machinery
- Measurement and control engineering
- Lifting and handling equipment
- Process automation
- Special vehicles
- Ticketing machines
- Medical equipment

Functions

- Pushbutton
- Illuminated pushbutton
- Indicator

Design

- Flush
- Raised

IP front protection

- IP40
- IP65
- IP67

Raitings

- 42 VAC (100 mA)
- 240 VAC (1.5 A)

Mounting cut-outs

- Ø 22.3 mm
- Ø 30.5 mm

Terminal

- Soldering/plug-in terminal
- PCB
- Cable

Lens Material

- Aluminium
- Plastic

Markings

- Engraving
- Laser marking
- Hot stamping
- Pad printing
- Screen print
- Milling

Approvals

- CB (IEC 60947)
- UL
- TSI PRM

Conformities

- CE
- 2006/42/EC (MD)
- 2011/65/EC (RoHS)
- 1300/2014 (PRM)
- 2014/30/EU (EMC)

Content 84

Flush design

Pushbutton standard	4
Pushbutton PCB standard	6
Pushbutton ring illumination standard	8
Pushbutton ring illumination PCB standard	9
Pushbutton ring illumination PCB or Halo compact	10
Illuminated pushbutton standard	11
Illuminated pushbutton PCB standard	13
Indicator standard	15
Indicator PCB standard	16
Indicator ring illumination standard	17
Indicator ring illumination PCB standard	18
Indicator ring illumination PCB or Halo compact	19
Raised design	
Stop switch	20
Emergency stop switch	23
Emergency stop switch, Bi-Colour	26
Components	**28**
Accessories	**43**
Technical data	**52**
Application guidelines	**57**
Index	**58**

Pushbutton standard, IP40, IP67

Product can differ from the current configuration.

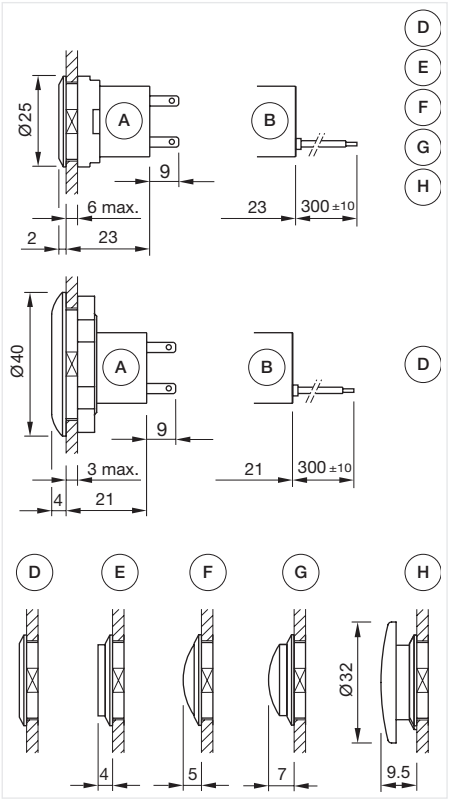

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable
D = Lens level with bezel
E = Lens raised above bezel
F = Lens konvexe level with bezel
G =Lens convexe raised above bezel
H = Mushroom-head cap

Equipment consisting of (schematic overview)



Lens — Page 28

Actuator

Fixing nut

Switching element — Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

General information

- Non-illuminated lens and bezel
- The colour of anodised aluminium parts can vary due to technical production reasons

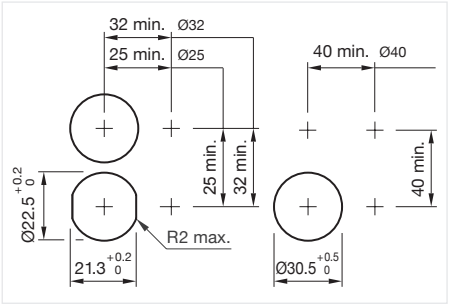

Mounting cut-outs [mm]

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Black	Plastic	IP67	Ø 25 mm	84-1101.0	72
	Black	Aluminium	IP67	Ø 25 mm	84-1201.0	72
	Red	Aluminium	IP67	Ø 25 mm	84-1201.2	72
	Gold	Aluminium	IP67	Ø 25 mm	84-1201.4	72
	Olive	Aluminium	IP67	Ø 25 mm	84-1201.5	72
	Blue	Aluminium	IP67	Ø 25 mm	84-1201.6	72
	Nature	Aluminium	IP67	Ø 25 mm	84-1201.7	72
	Black	Plastic	IP40	Ø 25 mm	84-2101.0	294

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Nature	Aluminium	IP67	Ø 40 mm	84-1221.7	294

Wiring diagrams

Wiring diagram 72



Wiring diagram 294

Pushbutton PCB standard, IP40, IP67

Product can differ from the current configuration.

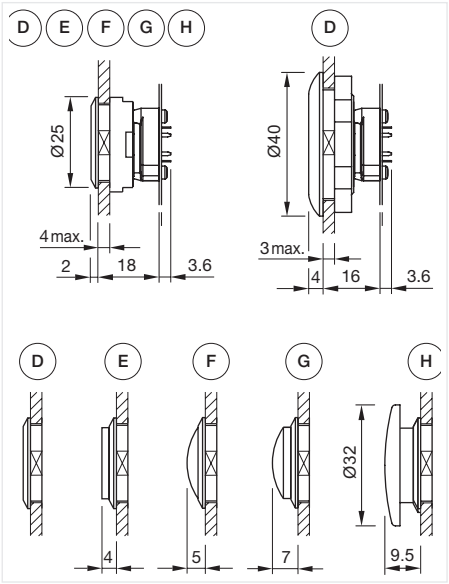

Dimensions [mm]
D = Lens level with bezel
E = Lens raised above bezel
F = Lens konvexe level with bezel
G = Lens convexe raised above bezel
H = Mushroom-head cap

Equipment consisting of (schematic overview)

Lens		Page 28
Actuator		
Fixing nut		
Mounting flange		Page 42
Switching element		Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

General information

- Non-illuminated lens and bezel
- The colour of anodised aluminium parts can vary due to technical production reasons

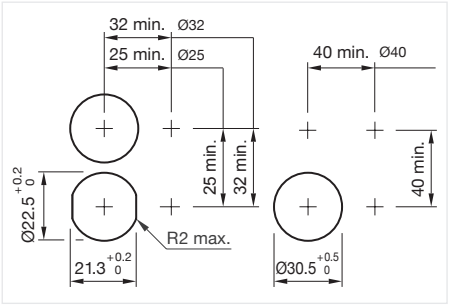

Mounting cut-outs [mm]

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Black	Plastic	IP67	Ø 25 mm	84-1101.0	72
	Black	Aluminium	IP67	Ø 25 mm	84-1201.0	72
	Red	Aluminium	IP67	Ø 25 mm	84-1201.2	72
	Gold	Aluminium	IP67	Ø 25 mm	84-1201.4	72
	Olive	Aluminium	IP67	Ø 25 mm	84-1201.5	72
	Blue	Aluminium	IP67	Ø 25 mm	84-1201.6	72
	Nature	Aluminium	IP67	Ø 25 mm	84-1201.7	72
	Black	Plastic	IP40	Ø 25 mm	84-2101.0	294

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Nature	Aluminium	IP67	Ø 40 mm	84-1221.7	294

Wiring diagrams



Wiring diagram 72



Wiring diagram 294

Compact, attractive and reliable.
Series 84 E-Stop switches.

Ideal for challenging applications – thanks to the attractive design and the very low back panel depth.

- Robust mono-block
- Foolproof and fail-safe design
- Very low back panel depth
- Attractive, modern design and protection IP65/67
- Reliable and long service life
- Clearly visible illumination

eao

Your Expert Partner for **Human Machine Interfaces**

Pushbutton ring illumination standard, IP67

Product can differ from the current configuration.

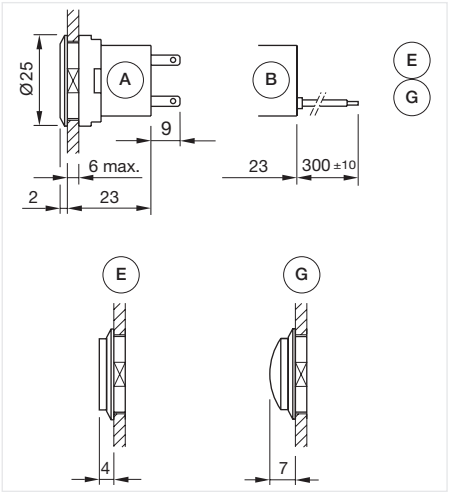

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable
E = Lens raised above bezel
G = Lens convexe raised above bezel

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut



Switching element Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

General information

- Front bezel illuminated
- Accessories for halo illumination: Essential lenses Part No. 84-7202.x00A and 84-7205.x00A

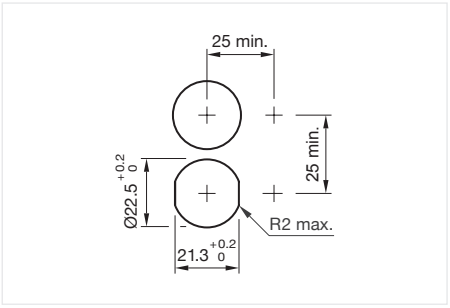

Mounting cut-outs [mm]

Actuator, Front dimension Ø 25 mm

Switching action	Front bezel colour	Front bezel material	IP front protection	Front bezel optics	Part No.	Wiring diagram
Momentary	White	Plastic	IP67	translucent	84-1091.7	294

Wiring diagrams



Wiring diagram 294

Pushbutton ring illumination PCB standard, IP67

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut

Mounting flange Page 42

Single-LED Page 32

Switching element Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

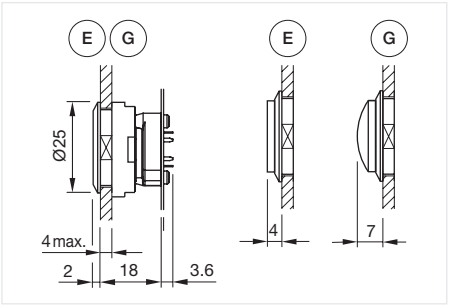

Dimensions [mm]
E = Lens raised above bezel
G = Lens convexe raised above bezel

Product can differ from the current configuration.

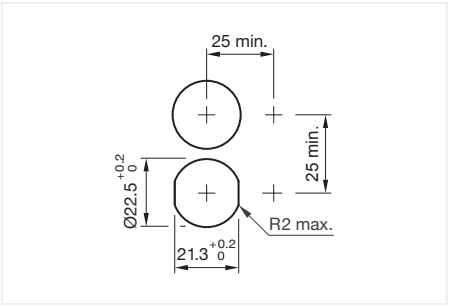

Mounting cut-outs [mm]

General information

- Front bezel illuminated
- Accessories for halo illumination: Essential lenses Part No. 84-7202.x00A and 84-7205.x00A

Actuator, Front dimension Ø 25 mm

Switching action	Front bezel colour	Front bezel material	IP front protection	Front bezel optics	Part No.	Wiring diagram
Momentary	White	Plastic	IP67	translucent	84-1091.7	294

Wiring diagrams



Wiring diagram 294

Pushbutton ring illumination PCB or Halo compact, IP67

Product can differ from the current configuration.

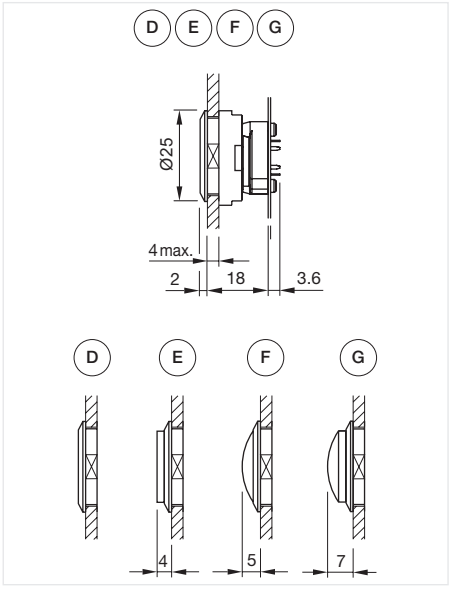

Dimensions [mm]
D = Lens level with bezel
E = Lens raised above bezel
F = Lens konvexe level with bezel
G = Lens convexe raised above bezel

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut

Mounting flange Page 42

Single-LED Page 32

Switching element Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

General information

- The mini TOP LEDs are not part of delivery. Recommendation: Osram Hyper Mini TOP LED

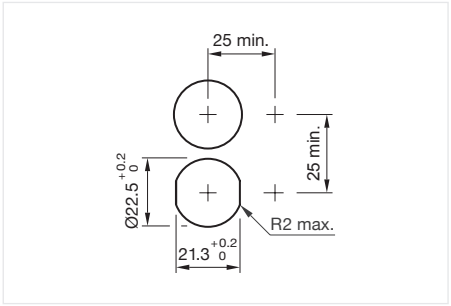

Mounting cut-outs [mm]

Actuator, Front dimension Ø 25 mm

Switching action	Front bezel colour	Front bezel material	IP front protection	Front bezel optics	Part No.	Wiring diagram
Momentary	Colourless	Plastic	IP67	transparent	84-1081.7	294

Wiring diagrams



Wiring diagram 294

Illuminated pushbutton standard, IP40, IP67

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut


Switching element Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

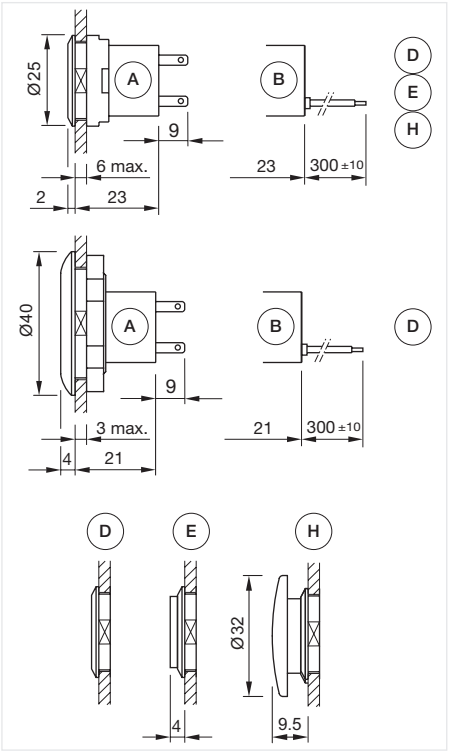

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable
D = Lens level with bezel
E = Lens raised above bezel
H = Mushroom-head cap

Product can differ from the current configuration.

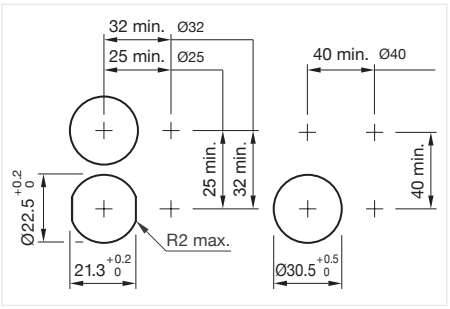

Mounting cut-outs [mm]

General information

- Illuminated lens, non-illuminated bezel
- The colour of anodised aluminium parts can vary due to technical production reasons

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Black	Plastic	IP67	Ø 25 mm	84-1101.0	72
	Black	Aluminium	IP67	Ø 25 mm	84-1201.0	72
	Red	Aluminium	IP67	Ø 25 mm	84-1201.2	72
	Gold	Aluminium	IP67	Ø 25 mm	84-1201.4	72
	Olive	Aluminium	IP67	Ø 25 mm	84-1201.5	72
	Blue	Aluminium	IP67	Ø 25 mm	84-1201.6	72
	Nature	Aluminium	IP67	Ø 25 mm	84-1201.7	72
	Black	Plastic	IP40	Ø 25 mm	84-2101.0	294

84 Flush design

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Nature	Aluminium	IP67	Ø 40 mm	84-1221.7	294

Wiring diagrams

Wiring diagram 72



Wiring diagram 294

eao

Your Expert Partner for **Human Machine Interfaces**

Illuminated pushbutton PCB standard, IP40, IP67

Equipment consisting of (schematic overview)

Lens — Page 28

Actuator

Fixing nut

Mounting flange — Page 42

Single-LED — Page 32

Switching element — Page 33

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

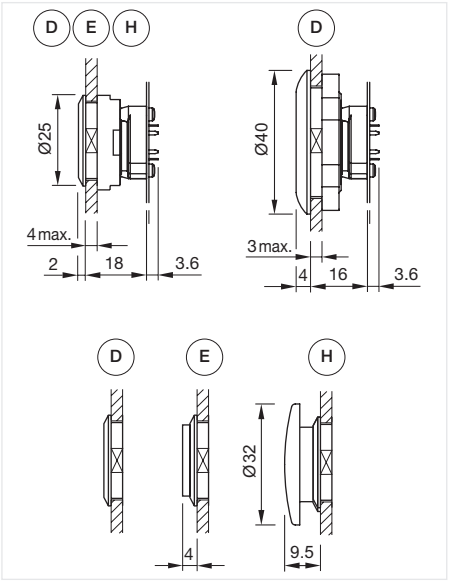

Dimensions [mm]
A = Lens level with bezel
E = Lens raised above bezel
H = Mushroom-head cap

Product can differ from the current configuration.

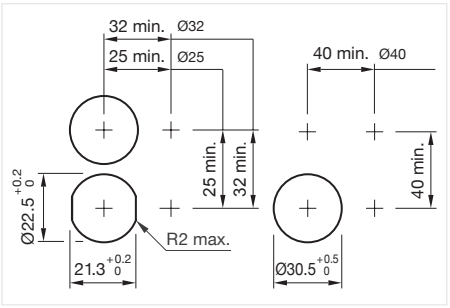

Mounting cut-outs [mm]

General information

- Illuminated lens, non-illuminated bezel
- The colour of anodised aluminium parts can vary due to technical production reasons

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Black	Plastic	IP67	Ø 25 mm	84-1101.0	72
	Black	Aluminium	IP67	Ø 25 mm	84-1201.0	72
	Red	Aluminium	IP67	Ø 25 mm	84-1201.2	72
	Gold	Aluminium	IP67	Ø 25 mm	84-1201.4	72
	Olive	Aluminium	IP67	Ø 25 mm	84-1201.5	72
	Blue	Aluminium	IP67	Ø 25 mm	84-1201.6	72
	Nature	Aluminium	IP67	Ø 25 mm	84-1201.7	72
	Black	Plastic	IP40	Ø 25 mm	84-2101.0	294

Actuator

Switching action	Front bezel colour	Front bezel material	IP front protection	Dimensions	Part No.	Wiring diagram
Momentary	Nature	Aluminium	IP67	Ø 40 mm	84-1221.7	294

84 Flush design

Wiring diagrams

Wiring diagram 72



Wiring diagram 294

Indicator standard, IP40, IP67

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut


Illumination element Page 37

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

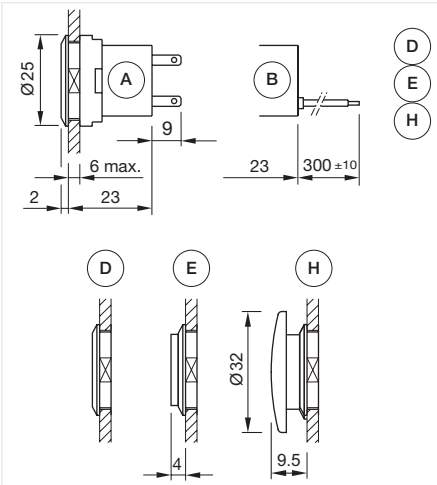

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable
D = Lens level with bezel
E = Lens raised above bezel
H = Mushroom-head cap

Product can differ from the current configuration.

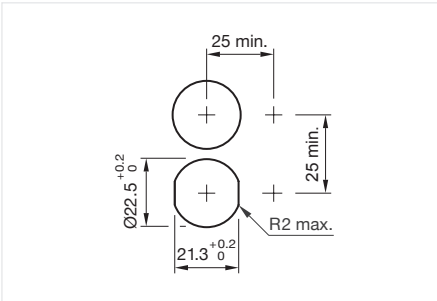

Mounting cut-outs [mm]

General information

- Illuminated lens, non-illuminated bezel
- The colour of anodised aluminium parts can vary due to technical production reasons

Actuator, Front dimension Ø 25 mm

IP front protection	Front bezel colour	Front bezel material	Part No.	Wiring diagram
IP67	Black	Plastic	84-0100.0	70
	Nature	Aluminium	84-0200.7	70
IP40	Black	Plastic	84-3100.0	70

Wiring diagrams

Wiring diagram 70

Indicator PCB standard, IP40, IP67

Product can differ from the current configuration.

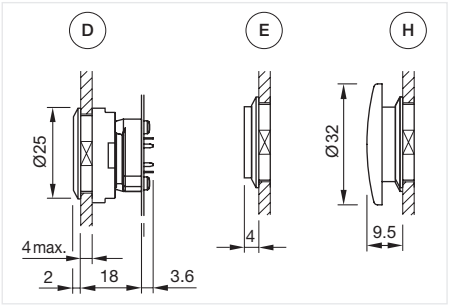

Dimensions [mm]
A = Lens level with bezel
E = Lens raised above bezel
H = Mushroom-head cap

General information

- Illuminated lens, non-illuminated bezel
- The colour of anodised aluminium parts can vary due to technical production reasons

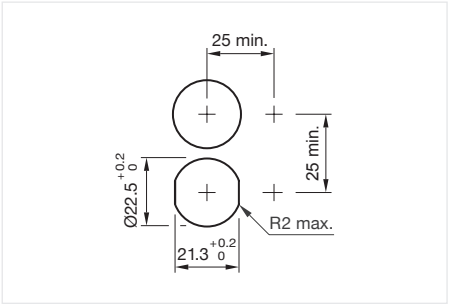

Mounting cut-outs [mm]

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut

Mounting flange Page 42

Single-LED Page 32

Illumination element Page 37

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Actuator, Front dimension Ø 25 mm

IP front protection	Front bezel colour	Front bezel material	Part No.	Wiring diagram
IP67	Black	Plastic	84-0100.0	70
	Nature	Aluminium	84-0200.7	70
IP40	Black	Plastic	84-3100.0	70

Wiring diagrams

Wiring diagram 70

Indicator ring illumination standard, IP67

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut


Illumination element Page 37

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

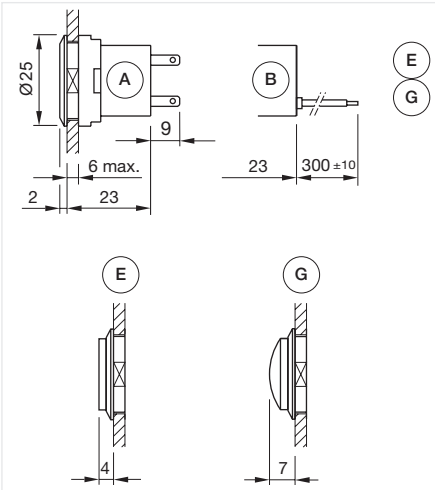

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable
E = Lens raised above bezel
G = Lens convexe raised above bezel

Product can differ from the current configuration.

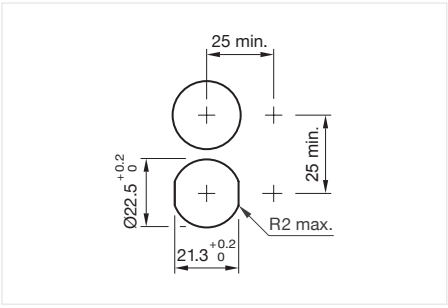

Mounting cut-outs [mm]

General information

- Front bezel illuminated
- Accessories for halo illumination: Essential lenses Part No. 84-7202.x00A and 84-7205.x00A

Actuator, Front dimension Ø 25 mm

IP front protection	Front bezel colour	Front bezel material	Front bezel optics	Part No.	Wiring diagram
IP67	Colourless	Plastic	translucent	84-0090.7	70

Wiring diagrams

Wiring diagram 70

Indicator ring illumination PCB standard, IP67

Product can differ from the current configuration.

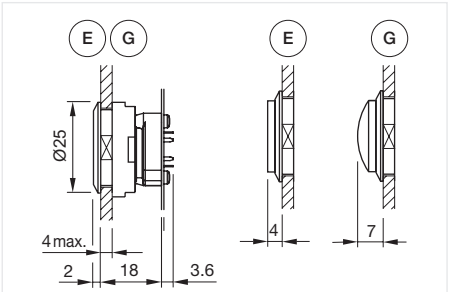

Dimensions [mm]
E = Lens raised above bezel
G = Lens convexe raised above bezel

General information

- Front bezel illuminated
- Accessories for halo illumination: Essential lenses Part No. 84-7202.x00A and 84-7205.x00A

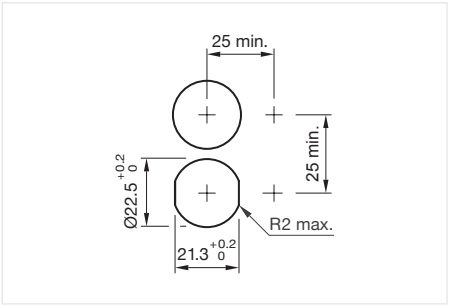

Mounting cut-outs [mm]

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut

Mounting flange Page 42

Single-LED Page 32

Illumination element Page 37

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Actuator, Front dimension Ø 25 mm

IP front protection	Front bezel colour	Front bezel material	Front bezel optics	Part No.	Wiring diagram
IP67	Colourless	Plastic	translucent	84-0090.7	70

Wiring diagrams

Wiring diagram 70

Indicator ring illumination PCB or Halo compact, IP67

Equipment consisting of (schematic overview)

Lens Page 28

Actuator

Fixing nut

Mounting flange Page 42

Single-LED Page 32

Illumination element Page 37

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

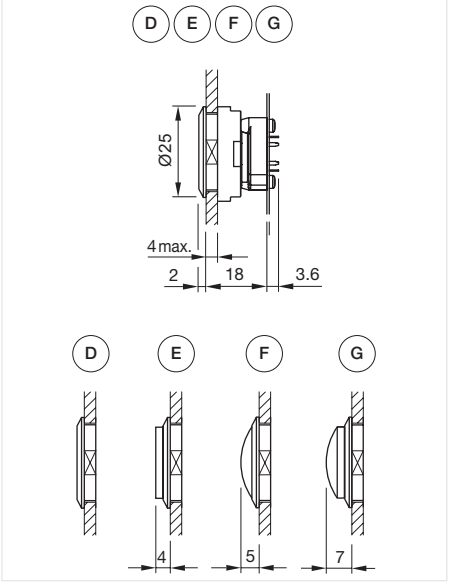

Dimensions [mm]
D = Lens level with bezel
E = Lens raised above bezel
F = Lens konvexe level with bezel
G = Lens convexe raised above bezel

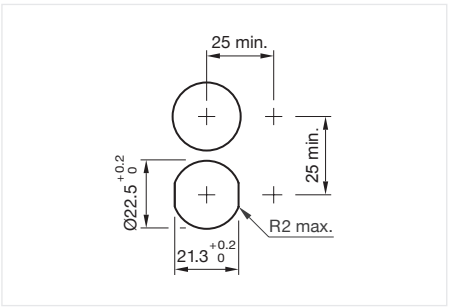

Mounting cut-outs [mm]

Product can differ from the current configuration.

General information

- The mini TOP LEDs are not part of delivery. Recommendation: Osram Hyper Mini TOP LED

Actuator, Front dimension Ø 25 mm

IP front protection	Front bezel colour	Front bezel material	Front bezel optics	Part No.	Wiring diagram
IP67	Colourless	Plastic	transparent	84-0080.7	70

Wiring diagrams

Wiring diagram 70

Stop switch, IP65, IP66, IP67

Product can differ from the current configuration.

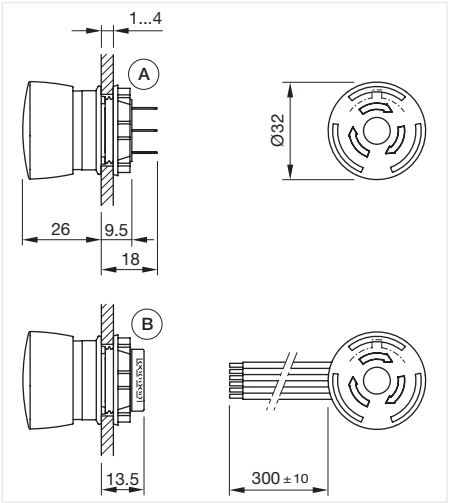

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable

Equipment consisting of (schematic overview)

Actuator

Fixing nut

Each Part Number listed below includes all the black components shown in the 3D-drawing.

General information

- Position indication ring black
- Lens plastic grey

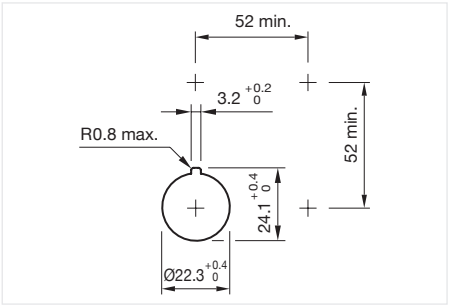

Mounting cut-outs [mm]

Stop switch, Front dimension Ø 32 mm

Switching action	Contacts	Terminal	Illumination colour	Part No.	Wiring diagram	Component Layout
Maintained	1 NC	Flat ribbon cable		84-6220.0040	426	98
	1 NC / 1 NO	Flat ribbon cable		84-6830.0040	427	98
	2 NC	Flat ribbon cable		84-6840.0040	428	98
	1 NC	Flat ribbon cable	Red	84-6821.2B40	429	98
	1 NC / 1 NO	Flat ribbon cable	Red	84-6831.2B40	431	98
	2 NC	Flat ribbon cable	Red	84-6841.2B40	430	98
	1 NC	Plug-in terminal		84-6220.0020	345	99
	1 NC / 1 NO	Plug-in terminal		84-6830.0020	346	99
	2 NC	Plug-in terminal		84-6840.0020	347	99
	1 NC	Plug-in terminal	Red	84-6821.2B20	348	99
	1 NC / 1 NO	Plug-in terminal	Red	84-6831.2B20	349	99
	2 NC	Plug-in terminal	Red	84-6841.2B20	350	99

Contacts: NC = Normally closed, NO = Normally open

Wiring diagrams



Wiring diagram 345



Wiring diagram 346



Wiring diagram 347



Wiring diagram 348



Wiring diagram 349



Wiring diagram 350



Wiring diagram 426



Wiring diagram 427



Wiring diagram 428



Wiring diagram 429



Wiring diagram 430

Component layouts

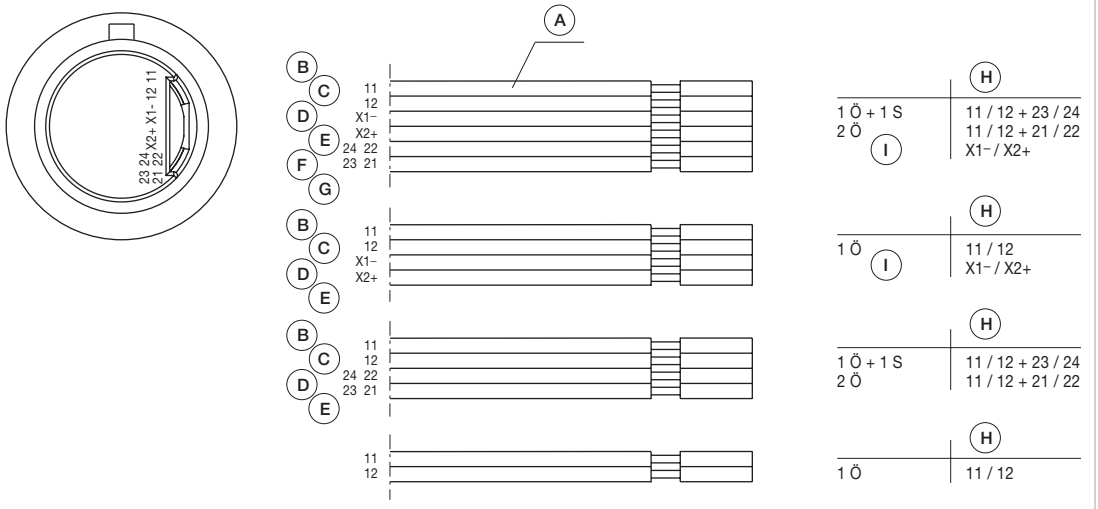

Component layout 98

Dimensions [mm]
A = Cable
B = white
C = brown
D = green
E = yellow
F = grey
G = pink
H = Terminals
I = Illumination

84 Raised design

Component layouts



Component layout 99

Compact, attractive and reliable.
Series 84 E-Stop switches.

Ideal for challenging applications – thanks to the attractive design and the very low back panel depth.

- Robust mono-block
- Foolproof and fail-safe design
- Very low back panel depth
- Attractive, modern design and protection IP65/67
- Reliable and long service life
- Clearly visible illumination

eao

Your Expert Partner for **Human Machine Interfaces**

Emergency stop switch, IP65, IP66, IP67

Equipment consisting of (schematic overview)

Actuator

Fixing nut

Each Part Number listed below includes all the black components shown in the 3D-drawing.

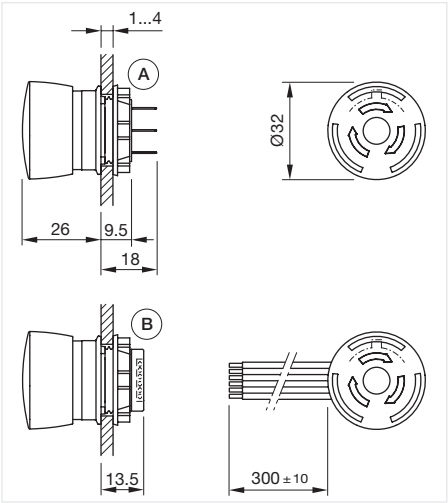

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable

Product can differ from the current configuration.

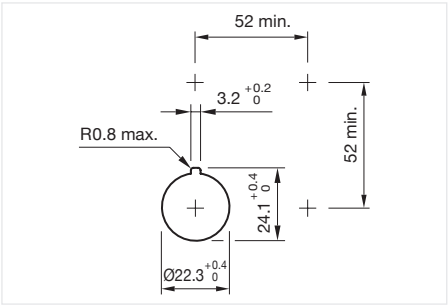

Mounting cut-outs [mm]

General information

- Lens plastic red

Emergency stop switch, Front dimension Ø 32 mm

Switching action	Contacts	Terminal	Illumination colour	Product attributes	Part No.	Wiring diagram	Component Layout
Maintained	1 NC	Plug-in terminal		Switching position ring black	84-5220.0020	345	99
	1 NC	Flat ribbon cable		Switching position ring black	84-5220.0040	426	98
	1 NC	Plug-in terminal	Red	Switching position ring black	84-5221.2B20	348	99
	1 NC	Flat ribbon cable	Red	Switching position ring black	84-5221.2B40	429	98
	1 NC / 1 NO	Plug-in terminal		Switching position ring black	84-5230.0020	346	99
	1 NC / 1 NO	Flat ribbon cable		Switching position ring black	84-5230.0040	427	98
	1 NC / 1 NO	Plug-in terminal	Red	Switching position ring black	84-5231.2B20	349	99
	1 NC / 1 NO	Flat ribbon cable	Red	Switching position ring black	84-5231.2B40	430	98
	2 NC	Plug-in terminal		Switching position ring black	84-5240.0020	347	99
	2 NC	Flat ribbon cable		Switching position ring black	84-5240.0040	428	98
	2 NC	Plug-in terminal	Red	Switching position ring black	84-5241.2B20	350	99
	2 NC	Flat ribbon cable	Red	Switching position ring black	84-5241.2B40	431	98
	1 NC	Plug-in terminal		Switching position ring green	84-5320.0020	345	99

Contacts: NC = Normally closed, NO = Normally open

84 Raised design

Switching action	Contacts	Terminal	Illumination colour	Product attributes	Part No.	Wiring diagram	Component Layout
Maintained	1 NC	Flat ribbon cable		Switching position ring green	84-5320.0040	426	98
	1 NC	Plug-in terminal	Red	Switching position ring green	84-5321.2B20	347	99
	1 NC	Flat ribbon cable	Red	Switching position ring green	84-5321.2B40	429	98
	1 NC / 1 NO	Plug-in terminal		Switching position ring green	84-5330.0020	346	99
	1 NC / 1 NO	Flat ribbon cable		Switching position ring green	84-5330.0040	427	98
	1 NC / 1 NO	Plug-in terminal	Red	Switching position ring green	84-5331.2B20	349	99
	1 NC / 1 NO	Flat ribbon cable	Red	Switching position ring green	84-5331.2B40	430	98
	2 NC	Plug-in terminal		Twist to unlock clockwise, position indication ring green	84-5340.0020	347	99
	2 NC	Flat ribbon cable		Twist to unlock clockwise, position indication ring green	84-5340.0040	428	98
	2 NC	Plug-in terminal	Red	Twist to unlock clockwise, position indication ring green	84-5341.2B20	350	99
	2 NC	Flat ribbon cable	Red	Twist to unlock clockwise, position indication ring green	84-5341.2B40	431	98

Contacts: NC = Normally closed, NO = Normally open

Wiring diagrams



Wiring diagram 345



Wiring diagram 346



Wiring diagram 347



Wiring diagram 348



Wiring diagram 349



Wiring diagram 350



Wiring diagram 426



Wiring diagram 427



Wiring diagram 428



Wiring diagram 429



Wiring diagram 430



Wiring diagram 431

Component layouts



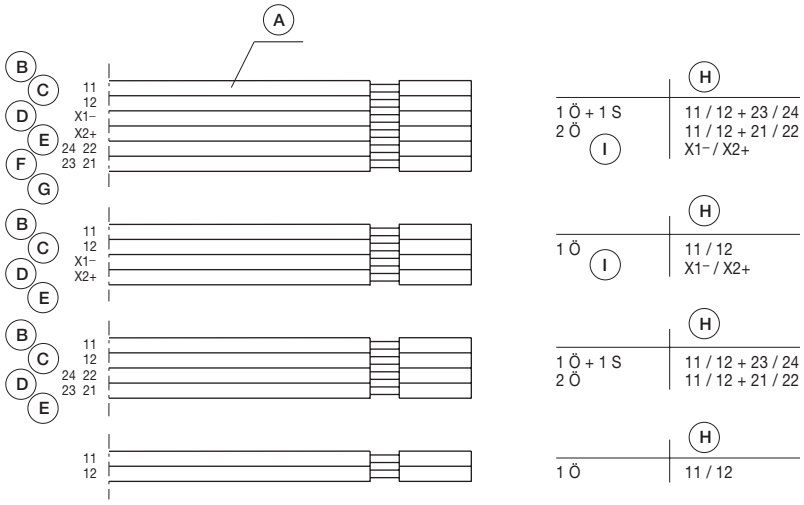

Component layout 98

Dimensions [mm]
A = Cable
B = white
C = brown
D = green
E = yellow
F = grey
G = pink
H = Terminals
I = Illumination

Component layout 99

Emergency stop switch, Bi-Colour, IP65, IP66, IP67

Product can differ from the current configuration.

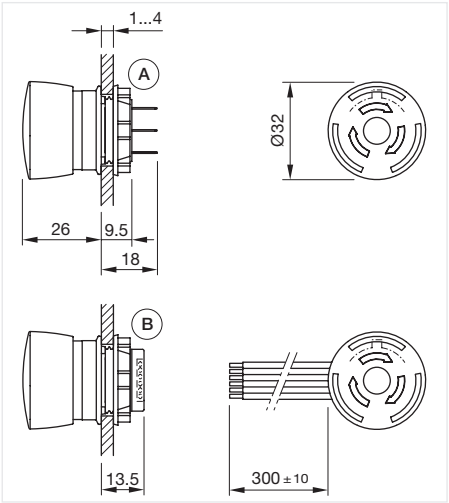

Dimensions [mm]
A = Plug-in terminal 2.8 mm x 0.5 mm
B = Flat ribbon cable

Equipment consisting of (schematic overview)

Actuator

Fixing nut

Each Part Number listed below includes all the black components shown in the 3D-drawing.

General information

- Lens plastic red
- Without built-in series resistor
- Operating voltage LED 2,0 VDC (Red), 3,05 VDC (Green)

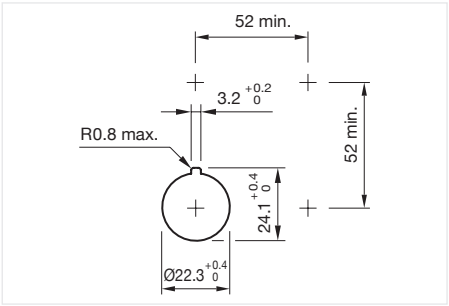

Mounting cut-outs [mm]

Emergency Stop Switch, Front dimension Ø 32 mm

Switching action	Contacts	Terminal	Illumination colour	Product attributes	Part No.	Wiring diagram	Component Layout
Maintained	2 NC	Plug-in terminal	Red / Green	Twist to unlock clockwise, position indication ring black	84-5241.8D20	344	99
	2 NC	Flat ribbon cable	Red / Green	Twist to unlock clockwise, position indication ring black	84-5241.8D40	344	98
	2 NC	Plug-in terminal	Red / Green	Twist to unlock clockwise, position indication ring black	84-5341.8D20	344	99
	2 NC	Flat ribbon cable	Red / Green	Twist to unlock clockwise, position indication ring black	84-5341.8D40	344	98

Contacts: NC = Normally closed

Wiring diagrams



Wiring diagram 344

Component layouts

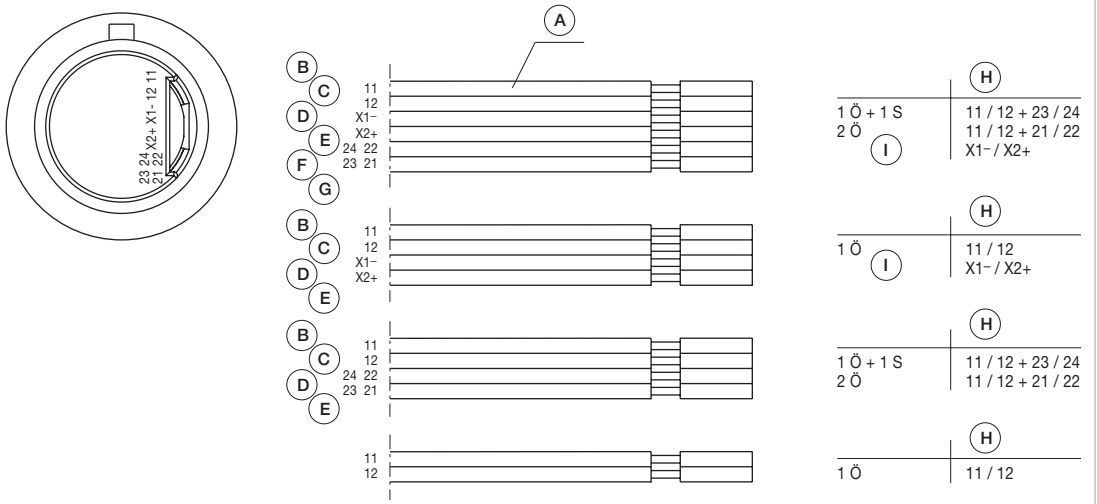

Component layout 98

Dimensions [mm]
A = Cable
B = white
C = brown
D = green
E = yellow
F = grey
G = pink
H = Terminals
I = Illumination



Component layout 99

Lens for stop request pushbutton

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Lens type	Symbol	Dimensions	Part No.
Aluminium	Nature	opaque	flush	non illuminative	raised above front bezel	Door open	Ø 19.7 mm	84-7205.804A
	Nature	opaque	flush	non illuminative	raised above front bezel	Wheelchair	Ø 19.7 mm	84-7205.805A
	Nature	opaque	flush	non illuminative	raised above front bezel	Baby pram	Ø 19.7 mm	84-7205.806A
	Nature	opaque	flush	non illuminative	raised above front bezel	Bell	Ø 19.7 mm	84-7205.808A

Additional information

- With raised labelling symbol, TSI compliant
- The colour of anodised aluminium parts can vary due to technical production reasons

Lens metall for halo illumination

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Lens type	Dimensions	Part No.
Aluminium	Black	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.000A
	Red	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.200A
	Gold	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.400A
	Olive green	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.500A
	Blue	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.600A
	Nature	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.800A
	Black	opaque	convex	non illuminative	raised above front bezel	Ø 19.7 mm	84-7202.000A
	Red	opaque	convex	non illuminative	raised above front bezel	Ø 19.7 mm	84-7202.200A
	Gold	opaque	convex	non illuminative	raised above front bezel	Ø 19.7 mm	84-7202.400A
	Olive green	opaque	convex	non illuminative	raised above front bezel	Ø 19.7 mm	84-7202.500B
	Blue	opaque	convex	non illuminative	raised above front bezel	Ø 19.7 mm	84-7202.600A
	Nature	opaque	convex	non illuminative	raised above front bezel	Ø 19.7 mm	84-7202.800A

Additional information

- The colour of anodised aluminium parts can vary due to technical production reasons

Lens plastic

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Lens type	Dimensions	Part No.
Plastic	Red	transparent	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7111.200
	Orange	transparent	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7111.300
	Yellow	transparent	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7111.400
	Green	transparent	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7111.500
	Blue	transparent	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7111.600
	Colourless	transparent	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7111.700
	Black	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7121.000
	Grey	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7121.800
	Red	transparent	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7115.200
	Orange	transparent	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7115.300
	Yellow	transparent	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7115.400
	Green	transparent	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7115.500
	Blue	transparent	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7115.600
	Colourless	transparent	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7115.700
	Black	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7125.000
	Grey	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7125.800

Lens plastic with symbol

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Lens type	Symbol	Dimensions	Part No.
Plastic	Red	transparent	flush	illuminative	level with front bezel	Ring	Ø 19.7 mm	84-7111.201
	Orange	transparent	flush	illuminative	level with front bezel	Ring	Ø 19.7 mm	84-7111.301
	Yellow	transparent	flush	illuminative	level with front bezel	Ring	Ø 19.7 mm	84-7111.401
	Green	transparent	flush	illuminative	level with front bezel	Ring	Ø 19.7 mm	84-7111.501
	Blue	transparent	flush	illuminative	level with front bezel	Ring	Ø 19.7 mm	84-7111.601
	Colourless	transparent	flush	illuminative	level with front bezel	Ring	Ø 19.7 mm	84-7111.701
	Red	transparent	flush	illuminative	level with front bezel	ON/OFF	Ø 19.7 mm	84-7111.202
	Green	transparent	flush	illuminative	level with front bezel	ON/OFF	Ø 19.7 mm	84-7111.502
	Blue	transparent	flush	illuminative	level with front bezel	ON/OFF	Ø 19.7 mm	84-7111.602
	Colourless	transparent	flush	illuminative	level with front bezel	ON/OFF	Ø 19.7 mm	84-7111.702
	Red	transparent	flush	illuminative	level with front bezel	Standby	Ø 19.7 mm	84-7111.203
	Green	transparent	flush	illuminative	level with front bezel	Standby	Ø 19.7 mm	84-7111.503
	Blue	transparent	flush	illuminative	level with front bezel	Standby	Ø 19.7 mm	84-7111.603
	Colourless	transparent	flush	illuminative	level with front bezel	Standby	Ø 19.7 mm	84-7111.703

Additional information

- The silvery coat is being applied on the lens (screen print) with an additional protective lacquer. Further information see Technical data

eao

Your Expert Partner for **Human Machine Interfaces**

Lens metal

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Lens type	Dimensions	Part No.
Aluminium	Black	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7201.000
	Red	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7201.200
	Gold	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7201.400
	Olive green	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7201.500
	Blue	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7201.600
	Nature	opaque	flush	non illuminative	level with front bezel	Ø 19.7 mm	84-7201.800
	Black	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.000
	Red	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.200
	Gold	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.400
	Olive green	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.500
	Blue	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.600
	Nature	opaque	flush	non illuminative	raised above front bezel	Ø 19.7 mm	84-7205.800
	Black	opaque	convex	non illuminative	level with front bezel	Ø 19.7 mm	84-7202.000
	Red	opaque	convex	non illuminative	level with front bezel	Ø 19.7 mm	84-7202.200
	Gold	opaque	convex	non illuminative	level with front bezel	Ø 19.7 mm	84-7202.400
	Olive green	opaque	convex	non illuminative	level with front bezel	Ø 19.7 mm	84-7202.500
	Blue	opaque	convex	non illuminative	level with front bezel	Ø 19.7 mm	84-7202.600
	Nature	opaque	convex	non illuminative	level with front bezel	Ø 19.7 mm	84-7202.800

Additional information

- The colour of anodised aluminium parts can vary due to technical production reasons

Lens metal with spot

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Lens type	Dimensions	Part No.
Aluminium	Black	opaque	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7211.000
	Red	opaque	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7211.200
	Gold	opaque	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7211.400
	Olive green	opaque	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7211.500
	Blue	opaque	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7211.600
	Nature	opaque	flush	illuminative	level with front bezel	Ø 19.7 mm	84-7211.800
	Black	opaque	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7215.000
	Red	opaque	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7215.200
	Gold	opaque	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7215.400
	Olive green	opaque	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7215.500
	Blue	opaque	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7215.600
	Nature	opaque	flush	illuminative	raised above front bezel	Ø 19.7 mm	84-7215.800

Additional information

- The colour of anodised aluminium parts can vary due to technical production reasons

Mushroom-head cap

Lens material	Lens colour	Lens optics	Lens shape	Lens illumination	Part No.
Plastic	Blue	transparent	mushroom-head	illuminative	84-7114.600A
	Black	opaque	mushroom-head	non illuminative	84-7124.000A
	Red	opaque	mushroom-head	non illuminative	84-7124.200A

Marking plate

Marking plate material	Marking plate colour	Marking plate optics	Marking plate illumination	Part No.
Plastic	Colourless	transparent	illuminative	61-9707.7

Additional information

- Can be hot stamped

Single-LED, T1 3/4 MG

Illumination colour	Lumi. Intensity	Dom. Wavelength	Forward voltage	Part No.	Wiring diagram
Red	160 mcd	625 nm	2.0 VDC @ 20 mA	10-2601.3172S	4
Amber	165 mcd	605 nm	2.0 VDC @ 20 mA	10-2601.3173S	4
Yellow	600 mcd	580 nm	2.9 VDC @ 20 mA	10-2603.3174S	4
Green	650 mcd	525 nm	3.2 VDC @ 20 mA	10-2603.3175S	4
Blue	250 mcd	467 nm	3.0 VDC @ 20 mA	10-2603.3176S	4
White	500 mcd	x: 0,31 / y: 0,32 nm	3.2 VDC @ 20 mA	10-2603.3178S	4

Additional information

- The customer has to decide what series resistor shall be used to the LED
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams

Wiring diagram

Bi-colour LED,T1 Bi-Pin

Illumination colour	Lumi. Intensity	Dom. Wavelength	Forward voltage	Part No.	Wiring diagram
Red / Green	1000/1800 mcd	628 / 525 nm	1.9 / 3.5 VDC @ 20 mA	10-2603.320AL	352
Green / Yellow	1100/900 mcd	588 / 525 nm	2.0 / 3.2 VDC @ 20 mA	10-2603.320CL	352

Additional information

- The customer has to decide what series resistor shall be used to the LED
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams



Wiring diagram 352

Switching element with illumination and plug-in terminal

IP Protection	Illumination colour	Operating voltage	Operation current	Terminal	Part No.	Wiring diagram
IP40	Red	12 V DC ±10 %	10 mA	Plug-in terminal	84-8511.2320	354
	Orange	12 V DC ±10 %	10 mA	Plug-in terminal	84-8511.3320	354
	Yellow	12 V DC ±10 %	10 mA	Plug-in terminal	84-8511.4320	354
	Green	12 V DC ±10 %	10 mA	Plug-in terminal	84-8511.5320	354
	Blue	12 V DC ±10 %	10 mA	Plug-in terminal	84-8511.6320	354
	White	12 V DC ±10 %	10 mA	Plug-in terminal	84-8511.9320	354
	Red	24 V DC ±10 %	10 mA	Plug-in terminal	84-8511.2620	354
	Orange	24 V DC ±10 %	10 mA	Plug-in terminal	84-8511.3620	354
	Yellow	24 V DC ±10 %	10 mA	Plug-in terminal	84-8511.4620	354
	Green	24 V DC ±10 %	10 mA	Plug-in terminal	84-8511.5620	354
	Blue	24 V DC ±10 %	10 mA	Plug-in terminal	84-8511.6620	354
	White	24 V DC ±10 %	10 mA	Plug-in terminal	84-8511.9620	354

Contacts: NO = Normally open

Additional information

- LED and built-in resistor included
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become loose
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams



Wiring diagram 354

Switching element with illumination andflat ribbon cable

IP Protection	Illumination colour	Operating voltage	Operation current	Terminal	Part No.	Wiring diagram
IP40	Red	12 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.2340	354
	Orange	12 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.3340	354
	Yellow	12 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.4340	354
	Green	12 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.5340	354
	Blue	12 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.6340	354
	White	12 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.9340	354
	Red	24 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.2640	354
	Orange	24 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.3640	354
	Yellow	24 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.4640	354
	Green	24 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.5640	354
	Blue	24 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.6640	354
	White	24 V DC ±10 %	10 mA	Flat ribbon cable	84-8511.9640	354

Contacts: NO = Normally open

Additional information

- LED and built-in resistor included
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become loose
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams



Wiring diagram 354

Switching element Bi-colour

Operating voltage	Switching system	Contacts	Contact material	Illumination colour	Terminal	Part No.	Wiring diagram
24 V DC ±10 %	Short-travel element	1 NO	Gold-plated silver	Red / Green	Flat ribbon cable	84-8515.8640	355
	Short-travel element	1 NO	Gold-plated silver	Yellow / Green	Flat ribbon cable	84-8515.7640	355

Contacts: NO = Normally open

Additional information

- LED and built-in resistor included
- Cabel connection IP 67, rear side fully sealed. The illumination element of the cable version cannot be disconnected from the actuator any longer
- Best illumination level will be reached with aluminium lens with spot, Part No. 84-7215.x00 and 84-7211.x00
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams



Wiring diagram 355

Switching element without illumination

Switching system	Contacts	Contact material	Terminal	Part No.	Wiring diagram
Short-travel element	1 NO	Gold-plated silver	Plug-in terminal	84-8510.0020	356
	1 NO	Gold-plated silver	Flat ribbon cable	84-8510.0040	356

Contacts: NO = Normally open

Additional information

- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become loose

Wiring diagrams



Wiring diagram 356

Switching element PCB illuminative

Switching system	Contacts	Contact material	Terminal	Part No.	Wiring diagram	Compo-nent Layout
Short-travel element	1 NO	Gold-plated silver	PCB terminal	92-851.342	332	82

Contacts: NO = Normally open

Additional information

- The customer has to decide what series resistor shall be used to the LED
- LED and mounting flange to be ordered separately

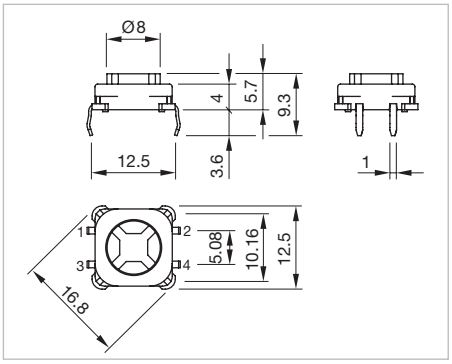

Dimensions [mm]

Wiring diagrams



Wiring diagram 332

Component layouts

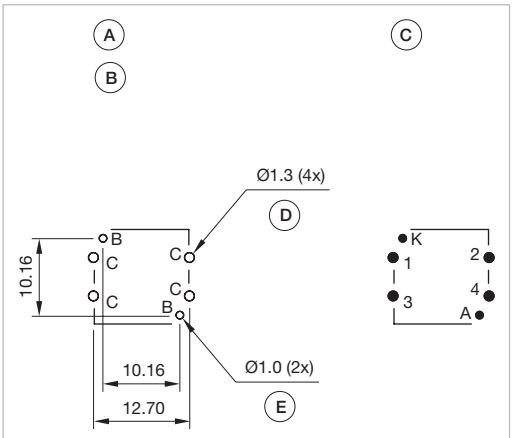

Component layout 82

Dimensions [mm]
A = Switching element with illumination
B = Single LED
C = Drilling plan (component side)
D = Hole for switching element, pad max. Ø 2.5 mm
E = Hole for LED

Illumination element with plug-in terminal

IP Protection	Illumination colour	Operating voltage	Terminal	Part No.	Wiring diagram
IP40	Red	12 V DC ±10 %	Plug-in terminal	84-8001.2320	351
	Yellow	12 V DC ±10 %	Plug-in terminal	84-8001.4320	351
	Green	12 V DC ±10 %	Plug-in terminal	84-8001.5320	351
	Blue	12 V DC ±10 %	Plug-in terminal	84-8001.6320	351
	White	12 V DC ±10 %	Plug-in terminal	84-8001.9320	351
	Red	24 V DC ±10 %	Plug-in terminal	84-8001.2620	351
	Amber	24 V DC ±10 %	Plug-in terminal	84-8001.3620	351
	Yellow	24 V DC ±10 %	Plug-in terminal	84-8001.4620	351
	Green	24 V DC ±10 %	Plug-in terminal	84-8001.5620	351
	Blue	24 V DC ±10 %	Plug-in terminal	84-8001.6620	351
	White	24 V DC ±10 %	Plug-in terminal	84-8001.9620	351

Additional information

- LED and built-in resistor included
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become loose
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.5 mm

Wiring diagrams



Wiring diagram 351

Illumination element with flat ribbon cable

IP Protection	Illumination colour	Operating voltage	Terminal	Part No.	Wiring diagram
IP40	Red	12 V DC ±10 %	Flat ribbon cable	84-8001.2340	351
	Yellow	12 V DC ±10 %	Flat ribbon cable	84-8001.4340	351
	Green	12 V DC ±10 %	Flat ribbon cable	84-8001.5340	351
	White	12 V DC ±10 %	Flat ribbon cable	84-8001.9340	351
	Red	24 V DC ±10 %	Flat ribbon cable	84-8001.2640	351
	Amber	24 V DC ±10 %	Flat ribbon cable	84-8001.3640	351
	Yellow	24 V DC ±10 %	Flat ribbon cable	84-8001.4640	351
	Green	24 V DC ±10 %	Flat ribbon cable	84-8001.5640	351
	Blue	24 V DC ±10 %	Flat ribbon cable	84-8001.6640	351
	White	24 V DC ±10 %	Flat ribbon cable	84-8001.9640	351

Additional information

- LED and built-in resistor included
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become loose
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams



Wiring diagram 351

Illumination element bi-colour

IP Protection	Illumination colour	Operating voltage	Terminal	Part No.	Wiring diagram
IP40	Yellow / Green	24 V AC/DC ±10 %	Plug-in terminal	84-8005.7620	352
	Red / Green	24 V AC/DC ±10 %	Plug-in terminal	84-8005.8620	353
IP67	Yellow / Green	24 V AC/DC ±10 %	Flat ribbon cable	84-8005.7640	352
	Red / Green	24 V AC/DC ±10 %	Flat ribbon cable	84-8005.8640	353

Additional information

- LED and built-in resistor included
- Standard version: Cable length 300 mm with insulated ferrule, plug-in terminal 2.8 mm x 0.8 mm
- Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67)
- Best illumination level will be reached with aluminium lens with spot, Part No. 84-7215.x00 and 84-7211.x00
- Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become loose
- Cabel connection IP 67, rear side fully sealed. The illumination element of the cable version cannot be disconnected from the actuator any longer
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams



Wiring diagram 352



Wiring diagram 353

Switching element Halo Compact

Operating voltage	Operation current	Switching system	Contacts	Contact material	Illumination colour	Terminal	Part No.	Wiring diagram	Component Layout
24 V DC ±10 %	80 mA	Short-travel element	1 NO	Gold-plated silver	Red	Soldering / Plug-in terminal	84-8716.2620	439	103
	80 mA	Short-travel element	1 NO	Gold-plated silver	Yellow	Soldering / Plug-in terminal	84-8716.4620	439	103
	80 mA	Short-travel element	1 NO	Gold-plated silver	Green	Soldering / Plug-in terminal	84-8716.5620	439	103
	80 mA	Short-travel element	1 NO	Gold-plated silver	Blue	Soldering / Plug-in terminal	84-8716.6620	439	103
	80 mA	Short-travel element	1 NO	Gold-plated silver	White	Soldering / Plug-in terminal	84-8716.9620	439	103
	80 mA	Short-travel element	1 NO	Gold-plated silver	Red / Green	Soldering / Plug-in terminal	84-8716.8620	439	103

Contacts: NO = Normally open

Additional information

- Preconfigured light sequences see Technical data
- Integrated electronig switch for latching function (High-Side-Switch)

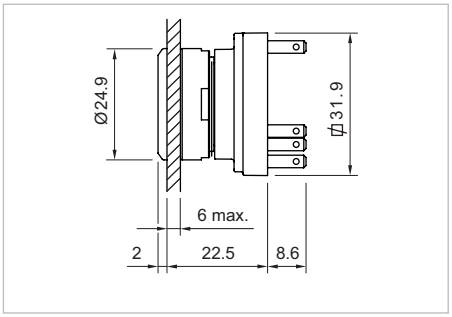

Dimensions [mm]

Wiring diagrams



Wiring diagram 439

Component layouts

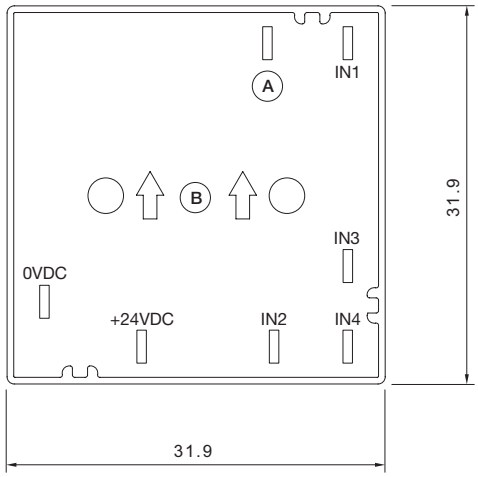

Component layout 103

A = Switch out
B = Top

Illumination element PCB

Terminal	Part No.	Wiring diagram	Component Layout
PCB terminal	92-800.042	330	79

Additional information

- The customer has to decide what series resistor shall be used to the LED
- LED and mounting flange to be ordered separately

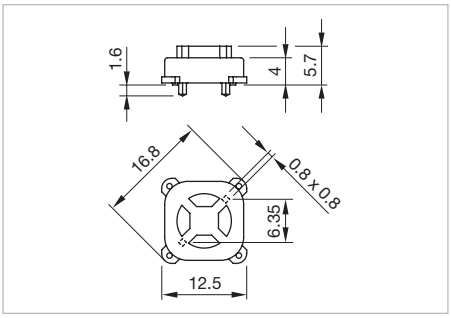

Dimensions [mm]

Wiring diagrams



Wiring diagram 330

Component layouts

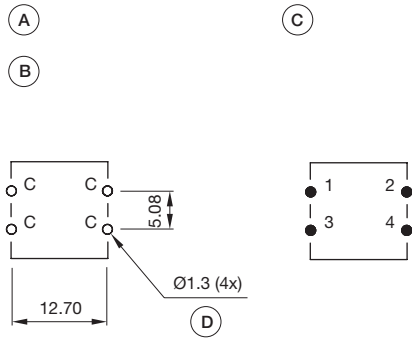

Component layout 79

Dimensions [mm]
A = Switching element without illumination
B = Drilling plan (component side)
C = Occupancy plan (component side)
D = Hole for switching element

Mounting flange

Product attributes	Material	Fastening	Part No.
Tightening torque fixing screw 0.3 Nm	Plastic	With screws	92-960.0
Halo illumination (illuminated multi-color bezel)	Plastic	Mit Schrauben	84-960.0

Additional information

- For discrete switching applications including switching element and mounting flange, soldering terminal (assembled PCB incl. series resistor and LED on request)
- Halo illumination (illuminated multi-color bezel)

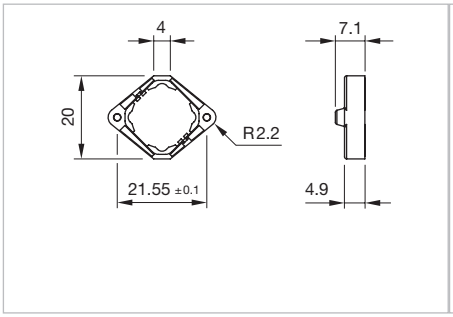

Dimensions [mm]
for Part No. 92-960.0

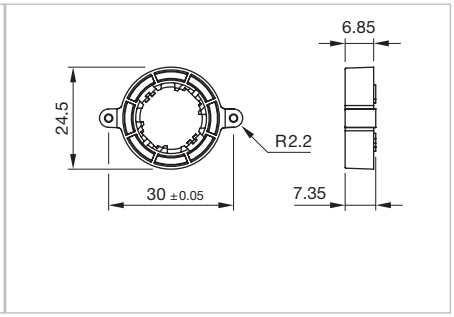

Dimensions [mm]
for Part No. 84-960.0

Front side

Legend frame

Dimensions	Material	Colour	Surface	Mounting type	Part No.
30 mm x 50 mm	Aluminium	Black	anodised	adhesive	61-9980.0

Additional information

- For devices with front dimension Ø 25 mm, flush design
- The colour of anodised aluminium parts can vary due to technical production reasons

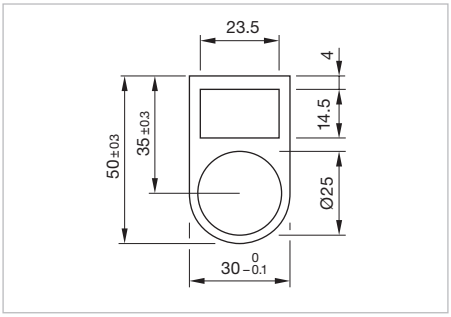

Dimensions [mm]

Legend plate

Product attributes	Dimensions	Material	Colour	Surface	Mounting type	Part No.
For legend frame Part No.704.968.2 and 704.968.3	14.5 mm x 23.5 mm	Aluminium	Nature	anodised	adhesive	704.968.0
	14.5 mm x 23.5 mm	Aluminium	Black	anodised	adhesive	704.968.1

Additional information

- The colour of anodised aluminium parts can vary due to technical production reasons

Emergency stop legend

Dimensions	Material	Colour	Mounting cut-out	Marking	Part No.
Ø 60 mm	Plastic	Yellow	Ø 22.3 mm	NOT AUS	704.963.5
	Plastic	Yellow	Ø 22.3 mm	EMERGENCY STOP	704.963.6
	Plastic	Yellow	Ø 22.3 mm	ARRET D'URGENCE	704.963.7
	Plastic	Yellow	Ø 22.3 mm	NOT HALT	704.963.8
	Plastic	Yellow	Ø 22.3 mm	EN ISO 13850 symbol	704.963.9
Ø 90 mm	Plastic	Yellow	Ø 22.3 mm	NOT AUS	704.963.0
	Plastic	Yellow	Ø 22.3 mm	EMERGENCY STOP	704.963.1
	Plastic	Yellow	Ø 22.3 mm	ARRET D'URGENCE	704.963.2
	Plastic	Yellow	Ø 22.3 mm	NOT HALT	704.963.3
	Plastic	Yellow	Ø 22.3 mm	EN ISO 13850 symbol	704.963.4

Additional information

- Front panel thickness 3 mm max.

Blind plug

Dimensions	Material	Colour	Mounting cut-out	Part No.
Ø 25 mm	Plastic	Black	Ø 25 mm	61-9453.0
Ø 36 mm	Plastic	Black	Ø 30.5 mm	704.964.8

Additional information

- Please note that bigger minimum distances are necessary

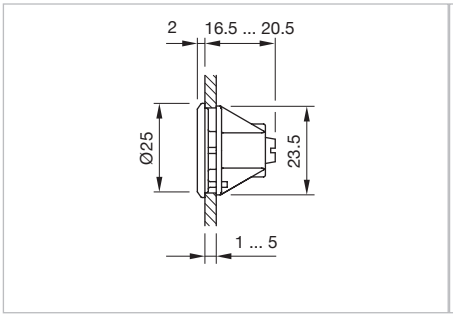

Dimensions [mm]
for Part No. 61-9453.0

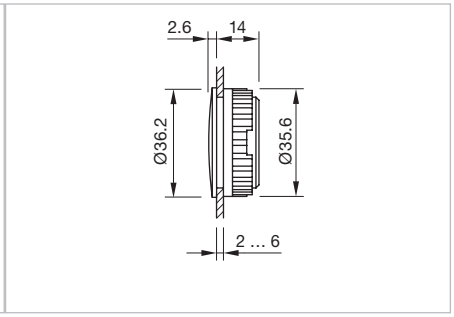

Dimensions [mm]
for Part No. 704.964.8

Protective cap

Product attributes	Material	Colour	Optics	Part No.
For front bezel Ø 25 mm	Silicone	Colourless	transparent	84-9103.7

Additional information

- For flat lens profil only
- When using the front protection cover the external sealing in the actuator has to be removed

Protection cover

Dimensions	Material	Colour	Part No.
Ø 36 mm	Plastic	Black	84-916

Additional information

- When mounting the protective cover 84-916 make sure that the USB adapter is mounted in center position.

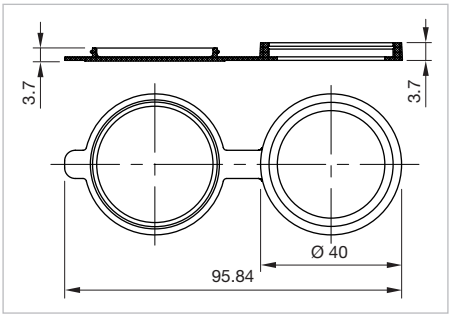

Dimensions [mm]

E stop protective shroud

Dimensions	Material	Colour	Marking	Part No.
Ø 50 mm	Plastic	Yellow		84-902
	Plastic	Yellow	NOT - AUS	84-902A
	Plastic	Yellow	EMERGENCY STOP	84-902B
	Plastic	Yellow	NOT - HALT	84-902D
Ø 45 mm	Metal	Yellow		84-909
Ø 50 mm	Plastic	Yellow		84-906

Additional information

- Front panel thickness 1 … 3 mm
- With anti-twist device
- When using a protective shroud the e-stop or stop-switch has to be turned by 180° to be mounted. See dimensional drawing
- The protection shroud Part No. 84-909 is not suitable for a proper use of emergency-stop. It can obstruct a spontaneous operation of the emergency-stop switch
- This shroud Part No. 84-906 is not compliant to EN ISO 13850. There are no restrictions when combined with stop switches.

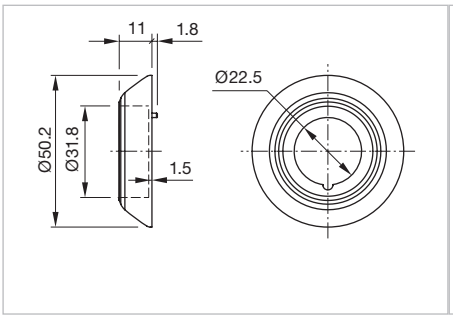

Dimensions [mm]
for Part No. 84-902, 84-902A
84-902B, 84-904C

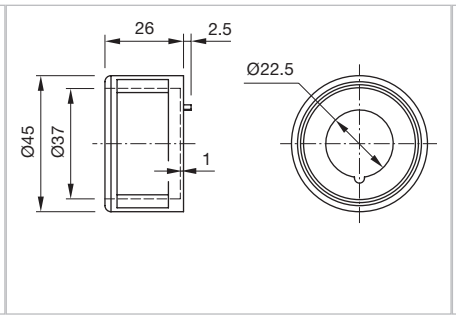

Dimensions [mm]
for Part No. 84-909

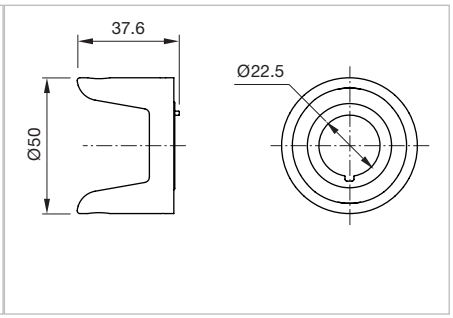

Dimensions [mm]
for Part No. 84-906

84 Accessories

USB socket

Material	Colour	Part No.
Plastic	Black	84-3103.0000.1
	Black	84-3103.0000.2

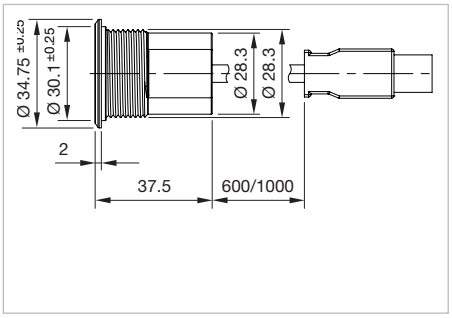

Dimensions [mm]

eao

Your Expert Partner for **Human Machine Interfaces**

Rear side

Adaptor reducing to 25 mm

Product attributes	Material	Colour	Part No.
For housing, pole mounting 35 mm dia.	Plastic	Yellow	84-9300.4
	Plastic	Grey	84-9300.8

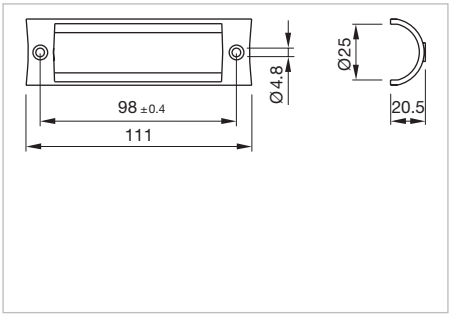

Dimensions [mm]

Adaptor reducing to 30 mm

Product attributes	Material	Colour	Part No.
For housing, pole mounting 35 mm dia.	Plastic	Yellow	84-9700.4
	Plastic	Grey	84-9700.8

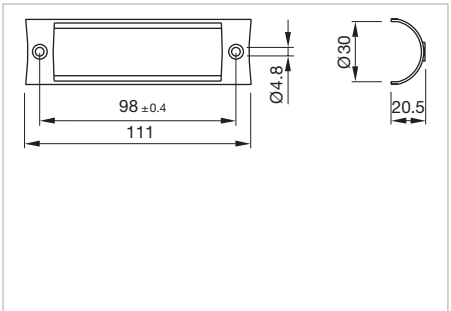

Dimensions [mm]

Flat receptacle

Product attributes	Material	Part No.
2.8 x 0.8 mm plug-in terminal	Metal	84-9420

Insulation sleeve

Product attributes	Material	Part No.
For flat receptacle 2.8 mm	Plastic	31-929

84 Accessories

PCB plug-in base

Dimensions	Material	Terminal	Pins	Part No.	Component Layout
20.3 mm x 8.3 mm x 15.8 mm	Metal / plastic	PCB terminal	Axial	84-920	102

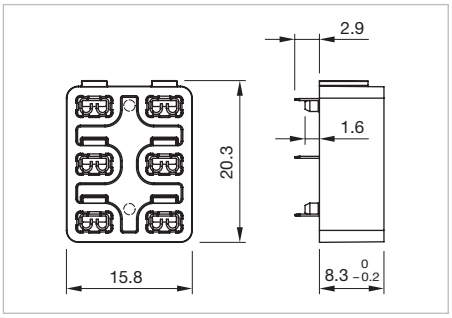

Dimensions [mm]

Component layouts

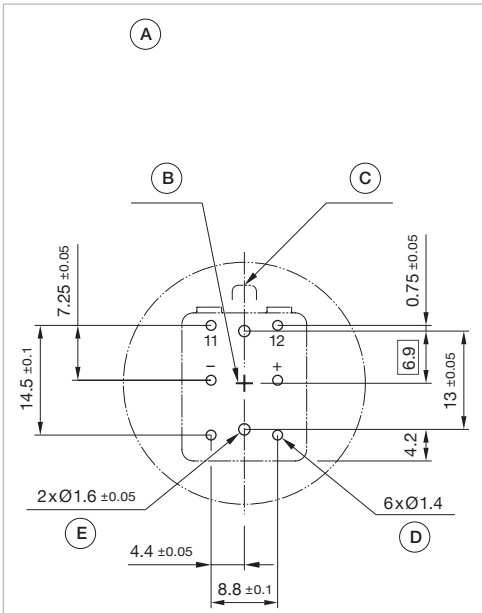

Component layout 102

Dimensions [mm]
A = Drilling plan (component side)
B = Centre from switch
C = Anti-twist protection
D = Pins for contacts/LED
E = Positioning hole

Plug

Material	Part No.
Plastic	84-900

Additional information

- For back protection IP67 of switching elements and illumination elements. Two plugs are nessecary per element

Mounting

Enclosure

Product attributes	Dimensions	Material	Colour	IP Protection	Part No.
With mounting cut-out 1 x Ø 22.3 mm, with anti-twist device	94 mm x 81 mm x 94 mm	Plastic	Grey	IP66	704.945.1
With mounting cut-out 2 x Ø 22.3 mm, with anti-twist device	130 mm x 81 mm x 94 mm	Plastic	Grey	IP66	704.945.2
With mounting cut-out 3 x Ø 22.3 mm, with anti-twist device	180 mm x 81 mm x 94 mm	Plastic	Grey	IP66	704.945.3
With mounting cut-out 4 x Ø 22.3 mm, with anti-twist device	180 mm x 110 mm x 182 mm	Plastic	Grey	IP66	704.945.4
With mounting cut-out 6 x Ø 22.3 mm, with anti-twist device	180 mm x 110 mm x 182 mm	Plastic	Grey	IP66	704.945.5
Bottom grey similar RAL 7035; cover lead-sealable, yellow similar RAL 1004	65 mm x 57 mm x 65 mm	Plastic		IP66	84-910

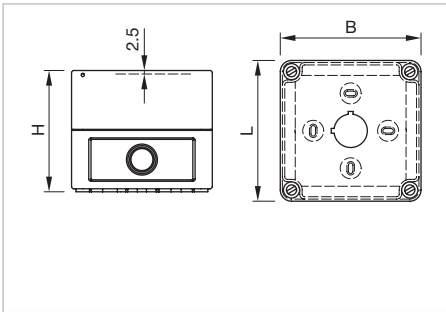

Dimensions [mm]
for Part No. 704.945.1, 704.945.2, 704.945.3, 704.945.4, 704.945.5

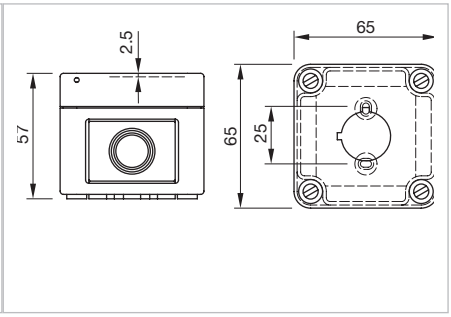

Dimensions [mm]
for Part No. 84-910

Fixing nut

Product attributes	Dimensions	Material	Colour	Part No.
For limited-space applications	Ø 28 mm	Plastic	Black	84-905
Standard delivery	Ø 30 mm	Plastic	Black	84-908
	Ø 30 mm	Plastic	Black	84-901

Dismantling tool

Product attributes	Material	Part No.
For dismantling switching elements or lenses	Metal / plastic	84-918

84 Accessories

Housing pole mounting 35 mm

Product attributes	Material	Colour	Part No.
Please note: The cut-out of the pole must read min. 22 mm and needs to be aligned with the switch	Plastic	Yellow	84-9500.4
	Plastic	Traffic blue	84-9500.6A
	Plastic	Grey	84-9500.8

Additional information

- Screws are not contained in the scope of supply

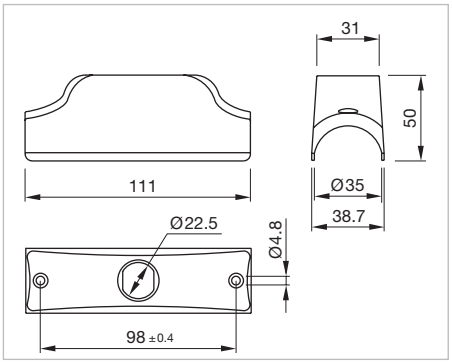

Dimensions [mm]

Housing pole mounting 38 mm

Product attributes	Material	Colour	Part No.
Please note: The cut-out of the pole must read min. 22 mm and needs to be aligned with the switch	Plastic	Yellow	84-9600.4
	Plastic	Grey	84-9600.8

Additional information

- Screws are not contained in the scope of supply

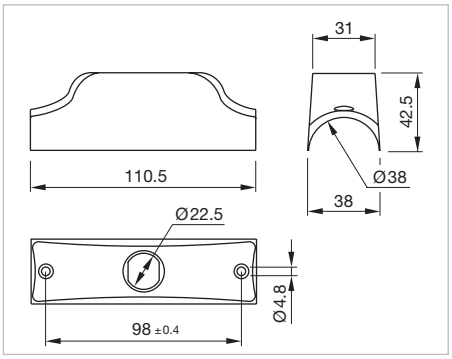

Dimensions [mm]

Housing wall mounting

Product attributes	Material	Colour	Part No.
Please note: The cut-out of the pole must read min. 22 mm and needs to be aligned with the switch	Plastic	Yellow	84-9800.4
	Plastic	Grey	84-9800.8

Additional information

- Screws are not contained in the scope of supply

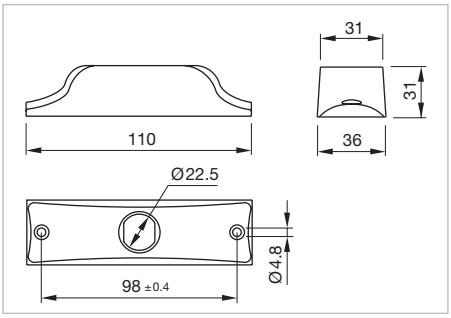

Dimensions [mm]

Cable gland

Product attributes	Material	Colour	IP Protection	Thread	Part No.
With traction relief	Plastic	Grey	IP68	M16 x 1.5 mm	61-9481.6
	Plastic	Grey	IP68	M20 x 1.5 mm	704.945.6

Mounting tool

Product attributes	Dimensions	Material	Part No.
For tightening or loosening the fixing nut, for emergency-stop and stop-switch		Metal	84-996
For tightening or loosening of the fixing nut Ø 22 mm	Ø 22 mm	Metal	84-997

84 Technical data

Emergency-stop

Switching system

The double-break switching system can be supplied for the following switching functions:
1 Normally closed, 2 Normally closed, 1 Normally closed + 1 Normally open.
The Normally closed contacts have forced opening according to EN 60947-5-5

Material

Connection cable
Plastic, operating temperature up to +65 °C

Mushroom-head cap
Plastic, as per UL 94 V0

Actuator housing
Plastic, as per UL 94 V0

Material of contact
Silver alloy gold plated

Mechanical characteristics

Front panel thickness
Standard 1 … 4 mm
with emergency stop protective shroud Part No. 84-902 1 … 3 mm

Mounting cut-outs
Ø 22.3 mm as per EN IEC 60947-5-1 with anti-twist device

Terminals
Soldering terminals 2.8 mm x 0.5 mm (solderable), CuSn6 tin-plated
Flat ribbon cable 2-, 4-, or 6-poles 0.35 mm² (AWG 22)

Tightening torque
Fixing nut 0.8 Nm

Actuating force
17 N ±4 N

Actuating travel
Approx. 5 mm

Mechanical lifetime
250 000 cycles of operations

Electrical characteristics

Standards
The devices comply with: EN IEC 60947-5-1, EN IEC 60947-5-5 (emergency stop), DIN EN ISO 13850, EN IEC 60204

Illumination
LED red with pole reversal, constant current source
Operation Voltage 5 VDC … 30 VDC
Current consumption 9.7 mA … 12.4 mA

Rated Operational Voltage U_e
250 VAC, as per EN IEC 60947-1

Rated Insulation Voltage U_i
250 V, as per EN IEC 60947-1

Rated Impulse Withstand Voltage U_{imp}
4 kV, as per EN IEC 60947-1

Electrical life
50 000 cycles of operations
(inductive cosφ 0,95) as per EN IEC 60947-5-1

Air thermal I_{th}
5 A (plug in)
3 A (cable leads

Switching voltage and switching current
Switch rating AC with silver contact (gold plated), service category AC-15, as per EN IEC 60947-5-1

Voltage	120 VAC	240 VAC
Current	3 A	1.5 A

Switch rating DC for silver contact (gold plated), service category DC-13, as per EN IEC 60947-5-1

NO contacts (48 VA)	NC contacts (60 VA)	NO/NC contacts
12 VDC / 2.0 A	12 VDC / 2.5 A	125 VDC / 0.22 A
24 VDC / 2.0 A	24 VDC / 2.5 A	250 VDC / 0.11 A
48 VDC / 1.0 A	48 VDC / 1.25 A	
60 VDC / 0.8 A	60 VDC / 1.0 A	

Recommended minimum operating data
Silver contacts (gold plated)

Voltage	1 VAC / DC
Current	1 mA

Electric strength
500 VAC, 50 Hz, 1 minute, as per DIN IEC 60512-2

Rated conditional short-circuit current
1000 A, type of short-circuit unit 6 A gG, as per EN IEC 60947-5-1

Protection class
Class II, as per EN IEC 60947-5

Overvoltage category
III, as per EN IEC 60947-1

Degree of pollution
3, as per EN IEC 60947-1

Ambient conditions

Storage temperature
-25 °C … +80 °C

Operating temperature
-25 °C … +65 °C

Front protection
IP65 front side, as per EN IEC 60529
IP66 front side, as per EN IEC 60529
IP67 front side, as per EN IEC 60529
IP20 (cable lead connection)

Impact resistance
IK07, as per IEC 62262

Shock resistance
(semi-sinusoidal)
Max. 150 m/s², pulse width 11 ms, 3-axis,
as per EN IEC 60068-2-27

Vibration resistance
(sinusoidal)
Max. 50 m/s² at 10 Hz … 500 Hz, 10 cycles, 3-axis,
as per EN IEC 60068-2-6

Climate resistance
Damp heat, cyclic
96 hours, +25 °C/97 %, +55 °C/93 % relative humidity,
as per EN IEC 60068-2-30
Damp heat, steady
56 days, +40 °C/93 % relative humidity,
as per EN IEC 60068-2-78

Dry heat
96 hours, +65 °C, as per EN IEC 60068-2-2

Low temperature
96 hours, –25 °C, as per EN IEC 60068-2-1

Saline mist
96 hours, +35 °C in chemical solution NaCl,
as per EN IEC 60068-2-11

Approvals

Approbations
CB (IEC 60947-5-1, IEC 60947-5-5)
UL NISD
CCC (pending)

Declaration of conformity
CE
2006/42/EC (MD)
2011/65/EC (RoHS)

Switching element illuminated pushbutton

Switching system

Short-travel switching system with 2 independent contact points and tactile operation.
Guarantees reliable switching even of very light loads.
Fitted with 1 normally open contact.

Material

Connection cable
Plastic, short-time heat-resistant up to 105 °C

Material of contact
Silver alloy gold plated

Switching element
Plastic, as per UL 94 V0 and
Plastic, as per UL 94 HB

Mechanical characteristics

Terminals
Plug-in terminals 2.8 mm x 0.8 mm (solderable)
Flat ribbon cable 0.5 mm²
PCB terminal

Actuating force
4.0 N ±0.2 N

Tightening torque
Fixing screw mounting flange 0.4 Nm

Actuating travel
~0.5 mm

Resistance to heat of soldering
250 °C, 3 s (PCB assembly)
320 °C, 3 s (when using a soldering iron)

84 Technical data

Mechanical lifetime
≥ 1 million cycles of operations

Electrical characteristics

Illumination
Single-Chip LED, green, orange, red, yellow, white and blue

Operation Voltage	12 VDC	24 VDC
Current consumption	10 mA	10 mA

Electrical life
as per EN IEC 60512-5

5 million cycles of operation	24 VAC,	50 mA at	480 Ω
5 million cycles of operation	24 VAC,	100 mA at	240 Ω
2 million cycles of operation	42 VAC,	50 mA at	840 Ω
2 million cycles of operation	42 VAC,	100 mA at	420 Ω
300 000 cycles of operation	42 VAC,	100 mA at cosφ	0.4
250 000 cycles of operation	42 VAC,	200 mA at cosφ	0.395
1 million cycles of operation	12 VDC,	250 mA at	48 Ω
1 million cycles of operation	24 VDC,	50 mA at	480 Ω
1 million cycles of operation	24 VDC,	100 mA at	240 Ω
5 million cycles of operation	42 VDC,	25 mA at	1680 Ω
1.5 million cycles of operation	42 VDC,	50 mA at	840 Ω
100 000 cycles of operation	42 VDC,	100 mA at	420 Ω
500 000 cycles of operation	24 VDC,	200 mA at L/R =	30 ms
300 000 cycles of operation	42 VDC,	100 mA at L/R =	30 ms
100 000 cycles of operation	42 VDC,	200 mA at L/R =	30 ms

Switching voltage and switching current

Voltage	50 mVAC/DC … 42 VAC/DC
Current	10 uA … 100 mA
Power	max. 2 W

Electric strength
500 VAC, 50 Hz, 1 minute, as per DIN IEC 60512-2

Ambient conditions

Storage temperature
–40 °C ... +85 °C

Operating temperature
–25 °C ... +70 °C

Protection degree
Back protection:
IP40, standard version
IP67, fully sealed version, with mounted actuator only.

Shock resistance
(semi-sinusoidal)
Max. 100 m/s², pulse width 11 ms, 3-axis,
as per EN IEC 60068-2-27

Vibration resistance
(sinusoidal)
Max. 50 m/s² at 10 Hz … 500 Hz, 10 cycles, 3-axis,
as per EN IEC 60068-2-6

Switching element Halo Compact

Switch configuration

A complete switch requires a halo compact programmable switch actuator body (transparent) and a lens. If the switch needs lens illumination in addition then a translucent plastic lens or aluminium lens with a window is required.

Use Halo Compact with illuminated pushbutton actuator (Part No. 84-1081.7) or with the indicator actuator (Part No. 84-0080.7).

The illumination style is selected by the connection of 24V to the pins.

Material

Housing
Plastic
Plastic (sealing compound)

Material of contact
Silver alloy, gold-plated
The materials used comply with the high EAO standards relating to quality, functional safety, service life and design.

Mechanical characteristics

Terminals
Soldering / plug-in terminals
2.8 mm x 0.8 mm (solderable)

Actuating force
4.0 N ± 0.2 N
(measured at the lens)

Actuating distance
~ 0.5 mm

Mechanical lifetime
≥ 1 million cycles of operation

Electrical characteristics

Switching element
Short-travel snap-action switching system with two independent contact points and tactile operation.

Number of contacts: one normal open contact

Output
Electronic high-side switch

Pre-configured light sequences
- Full illumination
- Blinking (interval: 1 second)
- Rotating/chasing (one full rotation per second)
- Process (changeover a group of 4 LEDs per second)

Special feature
Integrated electronic switch for maintained action
(High-side switch)

Operating voltage
24 VDC ± 10 %
Max. 100 mA

Current consumption
< 80 mA

LED-colours
All versions available with eight SMD LEDs for halo illumination plus one single LED (3mm) for central illumination. The following variants are available:

8 x red LEDs + 1 white single LED
8 x green LEDs + 1 white single LED
8 x yellow LEDs + 1 white single LED
8 x white LEDs + 1 white single LED
8 x blue LEDs + 1 white single LED
8 x red/green bi-colour LEDs + 1 white single LED

Light sequences central LED		IN1	IN2	IN3
not illuminated	illuminated			
1	–	0 VDC	0 VDC	0 VDC
2	–	+24 VDC	0 VDC	0 VDC
3	–	0 VDC	+24 VDC	0 VDC
4	–	+24 VDC	+24 VDC	0 VDC
–	5	0 VDC	0 VDC	+24 VDC
–	6	+24 VDC	0 VDC	+24 VDC
–	7	0 VDC	+24 VDC	+24 VDC
–	8	+24 VDC	+24 VDC	+24 VDC

* Functionen of light sequence:
1/5 = Full illuminiation
2/6 = Blink
3/7 = Rotation
4/8 = Process

Ambient conditions

Storage temperature
–40 °C ... +85 °C

Operating temperature
–25 °C ... +70 °C

Degree of protection
IP67 front side
(with actuator Part No. 84-1081.7 and 84-0080.7)

Shock resistance
(semi-sinusoidal)
Max. 100 m/s², pulse width 6 ms, 3-axis,
as per EN IEC 60068-2-27

Vibration resistance
(sinusoidal)
Max. 50 m/s² at 10 Hz … 500 Hz, 10 cycles, 3-axis,
as per EN IEC 60068-2-6

Approvals

Conformities
CE
2014/30/EU (EMC)
2011/65/EC (RoHS)

84 Technical data

Actuator

Material

Lens
Plastic, as per UL 94 V2 or Aluminium anodised

Actuator housing
Plastic, as per UL 94 V0 or Aluminium anodised

Mechanical characteristics

Tightening torque
Fixing nut max. 80 Ncm

Actuating force
4.0 N ±0.2 N (measured at the lens)

Actuating travel
1.2 mm

Mechanical lifetime
≥ 1 million cycles of operation

Electrical characteristics

Electrostatic breakdown value
Plastic case ≥15 kV
Aluminium case ≥5 kV
as per IEC 61000-4-2, mounted in plastic front panel

EAO reserves the right to alter specifications without further notice.

Ambient conditions

Storage temperature
–40 °C ... +85 °C

Operating temperature
–25 °C ... +70 °C

Protection degree
IP 67 and IP40 front side, as per EN IEC 60529

Climate resistance
Damp heat, cyclic
96 hours, +25 °C/97 %, +55 °C/93 % relative humidity,
as per EN IEC 60068-2-30

Damp heat, state
56 days, +40 °C/93 % relative humidity,
as per EN IEC 60068-2-78

Rapid change of temperature
100 cycles, –40 °C … +80 °C, as per EN IEC 60068-2-14

Approvals

Approbations
EBC (TSI/PRM)
NFF

Conformities
CE
2011/65/EC (RoHS)

Suppressor circuits

When switching inductive loads such as relays, DC motors, and DC solenoids, it is always important to absorb surges (e.g. with a diode) to protect the contacts. When these inductive loads are switched off, a counter emf can severely damage switch contacts and greatly shorten lifetime.

Fig. 1 shows an inductive load with a free-wheeling diode connected in parallel. This free-wheeling diode provides a path for the inductor current to flow when the current is interrupted by the switch. Without this free-wheeling diode, the voltage across the coil will be limited only by dielectric breakdown voltages of the circuit or parasitic elements of the coil. This voltage can be kilovolts in amplitude even when nominal circuit voltages are low (e.g. 12 VDC) see Fig. 2.

The free-wheeling diode should be chosen so that the reverse breakdown voltage is greater than the voltage driving the inductive load. The DC blocking voltage (VR) of the free-wheeling diode can be found in the datasheet of a diode. The forward current should be equal or greater than the maximum current flowing through the load.

To get an efficient protection, the free-wheeling diode must be connected as close as possible to the inductive load!

Switching with inductive load
Fig. 1

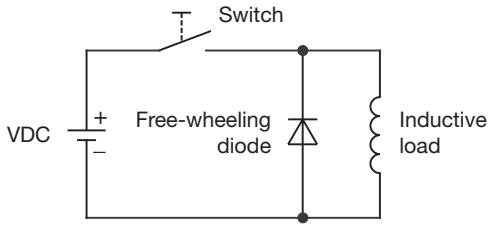

Counter EMF
over load without free-wheeling diode
Fig. 2

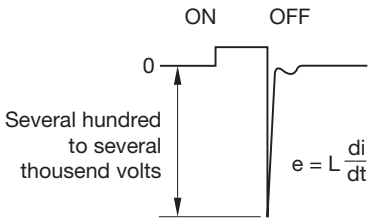

Note for soldering

Process parameter for wave soldering
Basic specification for wave soldering J-STD 75 W4C.

Maximum temperature on the component side (Temp 2): (Temperature must not exceed during the entire processing)	120 °C
Preheating phase (t1 … t2):	70 … 120 sec
Ramp up:	typ.+1 °C / sec
Ramp up to maximum temperature (t2 … t3):	not defined
Maximum temperature on the soldering side (Temp 3):	250 °C
Maximum time of soldering process (t3 … t4):	3 sec
Ramp down at 170 °C:	typ. –2 °C/sec

84 Application guidelines

Temperature curve wave soldering

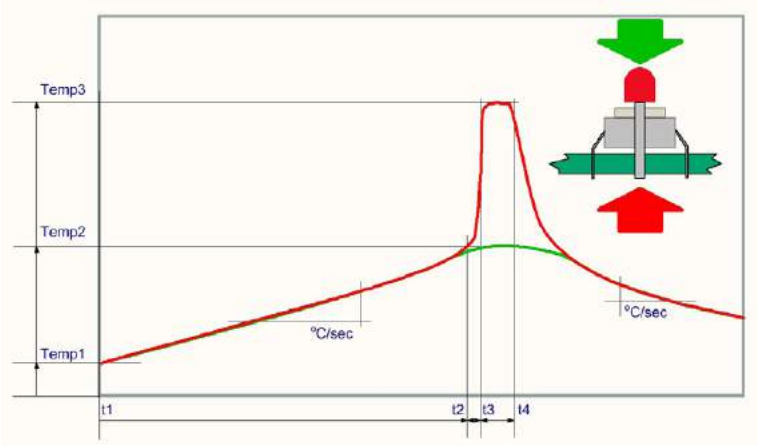

Green curve:	Temperature on the component side of the pcb	
Red curve:	Temperature on the soldering side of the pcb	
Room temperature:	Temp 1	
Preheating:	Temperature process =	Temp 1 … Temp 2
	Process time =	t1 … t2
Ramp up to soldering temperature:	Process time =	t2 … t3
Soldering phase:	Temperature process =	Temp 3
	Process time =	t3 … t4

Iron soldering

Basic specification for iron soldering IEC 60068-2-20

Maximum temperature at tip of iron:	320 °C
Maximum soldering time:	3 sec

Cleaning/Lacquering

The switching elements are not sealed. Cleaning up the PCB may damage the contacts in the switching elements. For this reason, the following points should be noted:

- When soldering make sure that the flux does not pass on the upper side of the PCB.
- When cleaning the PCB with detergents ensure that no dust or other debris may get inside of the switching elements.
- Ensure that no lacquer penetrates into the interior of the switching element when lacquering the PCB.

Storage of components

To obtain the optimum solderability of the components, the following points should be noted during storage:

- Do not store components in locations with high temperature or humidity.
- Do not expose components to corrosive gases.
- Avoid direct sunlight for a long period.

Arrangement mounting flange for switching- and illumination element, PCB mounting

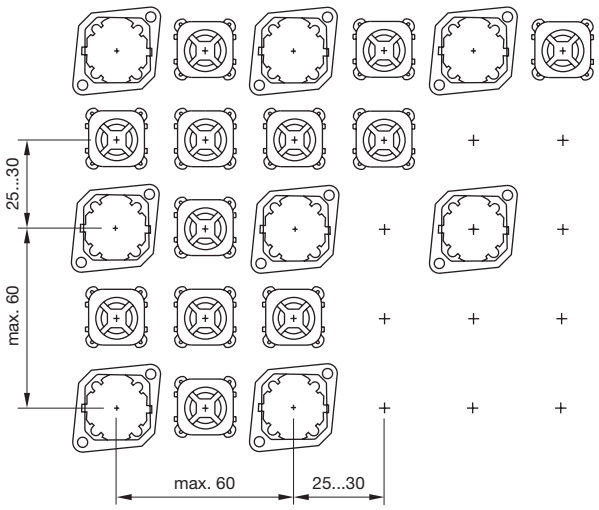

The arrangement of the mounting flanges and their number is determined by the size of the front panel or PCB. To ensure uniform, tactile switching, we recommend a layout of the flanges as per adjacent sketch.

For large PCBs with several switching elements we recommend the following procedure:

1. Fit the actuator to the front panel.
2. Clip the mounting flange to the rear of the intended actuator.
3. Screw the PCB with the components soldered to it to the assembled mounting flange.

This arrangement applies to PCBs 1.6 mm thick.

Dismantling mounting flange

The tool Part No. 84-998 must be used for removing the mounting flange from the actuator.

Before removing the flange, the PCB fixing srews must be loosened.

84 Index

Part No.	Page
10-2601.3172S	32
10-2601.3173S	32
10-2603.3174S	32
10-2603.3175S	32
10-2603.3176S	32
10-2603.3178S	32
10-2603.320AL	33
10-2603.320CL	33
31-929	47
61-9453.0	44
61-9481.6	51
61-9707.7	32
61-9980.0	43
704.945.1	49
704.945.2	49
704.945.3	49
704.945.4	49
704.945.5	49
704.945.6	51
704.963.0	44
704.963.1	44
704.963.2	44
704.963.3	44
704.963.4	44
704.963.5	44
704.963.6	44
704.963.7	44
704.963.8	44
704.963.9	44
704.964.8	44
704.968.0	43
704.968.1	43
84-0080.7	19
84-0090.7	17
84-0090.7	18
84-0100.0	15
84-0100.0	16
84-0200.7	15
84-0200.7	16
84-1081.7	10
84-1091.7	8
84-1091.7	9
84-1101.0	4
84-1101.0	6
84-1101.0	11
84-1101.0	13
84-1201.0	4
84-1201.0	6
84-1201.0	11
84-1201.0	13
84-1201.2	4
84-1201.2	6
84-1201.2	11
84-1201.2	13
84-1201.4	4
84-1201.4	6
84-1201.4	11
84-1201.4	13
84-1201.5	4
84-1201.5	6
84-1201.5	11
84-1201.5	13
84-1201.6	4
84-1201.6	6
84-1201.6	11
84-1201.6	13
84-1201.7	4
84-1201.7	6
84-1201.7	11
84-1201.7	13
84-1221.7	5
84-1221.7	6
84-1221.7	12
84-1221.7	13
84-2101.0	4
84-2101.0	6
84-2101.0	11
84-2101.0	13
84-3100.0	15
84-3100.0	16
84-3103.0000.1	46
84-3103.0000.2	46
84-5220.0020	23
84-5220.0040	23
84-5221.2B20	23
84-5221.2B40	23
84-5230.0020	23
84-5230.0040	23
84-5231.2B20	23
84-5231.2B40	23
84-5240.0020	23
84-5240.0040	23
84-5241.2B20	23
84-5241.2B40	23
84-5241.8D20	26
84-5241.8D40	26
84-5320.0020	23
84-5320.0040	24
84-5321.2B20	24
84-5321.2B40	24
84-5330.0020	24
84-5330.0040	24
84-5331.2B20	24
84-5331.2B40	24
84-5340.0020	24
84-5340.0040	24
84-5341.2B20	24
84-5341.2B40	24
84-5341.8D20	26
84-5341.8D40	26
84-6220.0020	20
84-6220.0040	20
84-6821.2B20	20
84-6821.2B40	20
84-6830.0020	20
84-6830.0040	20
84-6831.2B20	20
84-6831.2B40	20
84-6840.0020	20
84-6840.0040	20
84-6841.2B20	20
84-6841.2B40	20
84-7111.200	29
84-7111.201	30
84-7111.202	30
84-7111.203	30
84-7111.300	29
84-7111.301	30
84-7111.400	29
84-7111.401	30
84-7111.500	29
84-7111.501	30
84-7111.502	30
84-7111.503	30
84-7111.600	29
84-7111.601	30
84-7111.602	30
84-7111.603	30
84-7111.700	29
84-7111.701	30
84-7111.702	30
84-7111.703	30
84-7114.600A	32
84-7115.200	29
84-7115.300	29
84-7115.400	29
84-7115.500	29
84-7115.600	29
84-7115.700	29
84-7121.000	29
84-7121.800	29
84-7124.000A	32
84-7124.200A	32
84-7125.000	29
84-7125.800	29
84-7201.000	31
84-7201.200	31
84-7201.400	31
84-7201.500	31
84-7201.600	31
84-7201.800	31
84-7202.000	31
84-7202.000A	28
84-7202.200	31
84-7202.200A	28
84-7202.400	31
84-7202.400A	28
84-7202.500	31
84-7202.500B	28
84-7202.600	31
84-7202.600A	28
84-7202.800	31
84-7202.800A	28
84-7205.000	31
84-7205.000A	28
84-7205.200	31
84-7205.200A	28
84-7205.400	31
84-7205.400A	28
84-7205.500	31
84-7205.500A	28
84-7205.600	31
84-7205.600A	28
84-7205.800	31
84-7205.800A	28
84-7205.804A	28
84-7205.805A	28
84-7205.806A	28
84-7205.808A	28
84-7211.000	31
84-7211.200	31
84-7211.400	31
84-7211.500	31
84-7211.600	31
84-7211.800	31
84-7215.000	31
84-7215.200	31
84-7215.400	31
84-7215.500	31
84-7215.600	31
84-7215.800	31
84-8001.2320	37
84-8001.2340	38
84-8001.2620	37
84-8001.2640	38
84-8001.3620	37
84-8001.3640	38
84-8001.4320	37
84-8001.4340	38
84-8001.4620	37
84-8001.4640	38
84-8001.5320	37
84-8001.5340	38
84-8001.5620	37
84-8001.5640	38
84-8001.6320	37
84-8001.6620	37
84-8001.6640	38
84-8001.9320	37
84-8001.9340	38
84-8001.9620	37
84-8001.9640	38
84-8005.7620	39
84-8005.7640	39
84-8005.8620	39
84-8005.8640	39
84-8510.0020	35
84-8510.0040	35
84-8511.2320	33
84-8511.2340	34
84-8511.2620	33
84-8511.2640	34
84-8511.3320	33
84-8511.3340	34
84-8511.3620	33
84-8511.3640	34
84-8511.4320	33
84-8511.4340	34
84-8511.4620	33
84-8511.4640	34
84-8511.5320	33
84-8511.5340	34
84-8511.5620	33
84-8511.5640	34
84-8511.6320	33
84-8511.6340	34
84-8511.6620	33
84-8511.6640	34
84-8511.9320	33
84-8511.9340	34
84-8511.9620	33
84-8511.9640	34
84-8515.7640	35
84-8515.8640	35
84-8716.2620	40
84-8716.4620	40
84-8716.5620	40
84-8716.6620	40
84-8716.8620	40
84-8716.9620	40
84-900	48
84-901	49
84-902	45
84-902A	45
84-902B	45
84-902D	45
84-905	49
84-906	45
84-908	49
84-909	45
84-910	49
84-9103.7	44
84-916	45
84-918	49
84-920	48
84-9300.4	47
84-9300.8	47
84-9420	47
84-9500.4	50
84-9500.6A	50
84-9500.8	50
84-960.0	42
84-9600.4	50
84-9600.8	50
84-9700.4	47
84-9700.8	47
84-9800.4	51
84-9800.8	51
84-996	51
84-997	51
92-800.042	41
92-851.342	36
92-960.0	42

TecnelSystem S.p.A.

equipaggiamenti elettrici industriali

UNI EN ISO9001:2015
Nr. 9101.TNLS

TECNEL SYSTEM S.p.A. - Via Brunico 15 - 20126 Milano - Tel. 02 2578803 (r.a.) Fax 02 27001038 -
Cert.CSQ-IQNet ISO9001:2015 N. 9101TNLS www.tecnelsystem.it e-mail: tecnel@tecnelsystem.it